


Panasonic

NEW
AQUAREA RANGE
HIGH-EFFICIENCY
HEAT PUMP
TECHNOLOGY

2013 / 2014



NEW AQUAREA AIR TO WATER HEAT PUMP 2013 / 2014

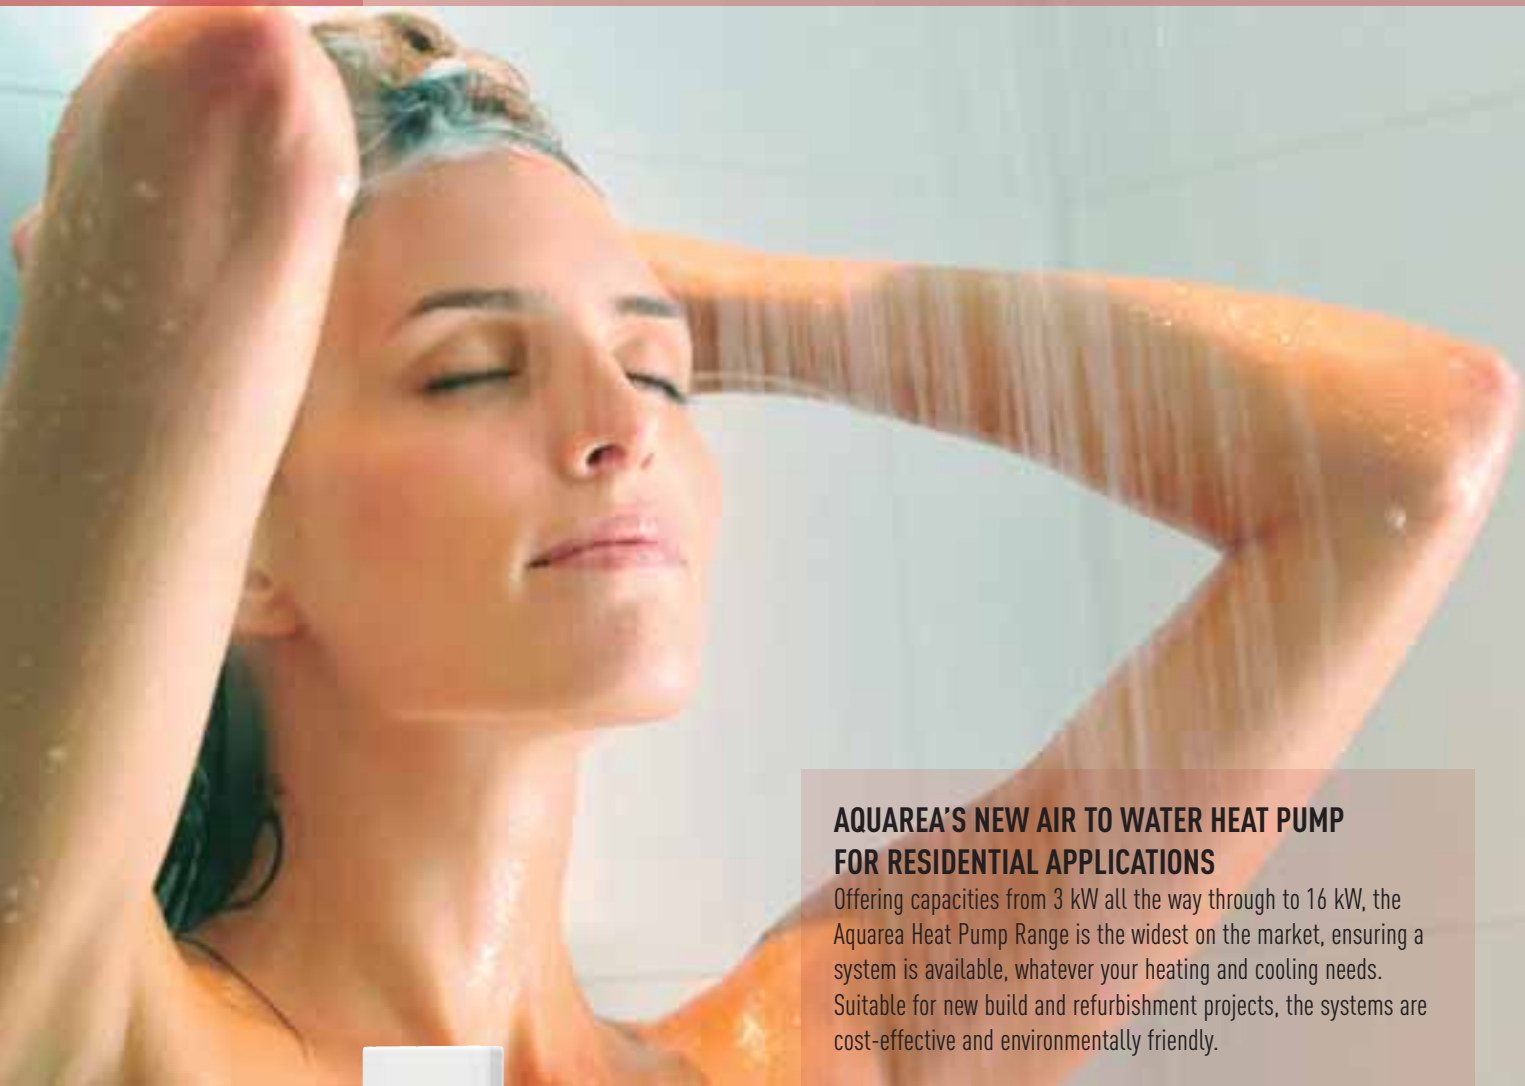

AQUAREA'S NEW AIR TO WATER HEAT PUMP FOR RESIDENTIAL APPLICATIONS

Offering capacities from 3 kW all the way through to 16 kW, the Aquarea Heat Pump Range is the widest on the market, ensuring a system is available, whatever your heating and cooling needs. Suitable for new build and refurbishment projects, the systems are cost-effective and environmentally friendly.

How do you get heating and hot water from air?

Introducing the Panasonic Aquarea – Air Source Heat Pump

An Aquarea Air Source Heat Pump captures fresh air and passes it over refrigerant-filled coils (think fridge!). The captured heat is automatically transferred to water, which is then ready for use in your heating system and for supplying all of your domestic hot water needs. Panasonic's latest technology offers you a sustainable alternative to oil, LPG and electric heating systems.



* Not all products certified. As the certification process is on-going and the list of certified products constantly changing, please check for latest details on the official websites.

SEASONAL EFFICIENCY

PRODUCT READY FOR THE NEW ErP ECODESIGN REQUIREMENTS LOT 1



DESIGNED FOR LOW CONSUMPTION HOMES

ENERGY SAVING

High efficiency heating
INVERTER+

Inverter+ System. The A Inverter+ system provides energy savings of up to 30% compared to non Inverter models. Both you, and nature, wins!

Environmentally friendly refrigerant
R410A / R407C

Refrigerant R410A / R407C. R410A / R407C offers optimal performance and involves no environmental cost since it does not harm the ozone layer.

Down to -20 °C in heating mode
OUTDOOR TEMPERATURE

Up to -20 °C In Heating Mode. The Heat Pumps works in heat pump mode with an outdoor temperature as low as -20 °C.

Boiler connection
RETROFIT

Renovation. Our Aquarea heat pumps can be connected to an existing or new boiler for optimum comfort even at very low outdoor temperatures.

Solar panels connection
SOLAR KIT

Solar Kit. For even greater efficiency, our Aquarea heat pumps can be connected to photovoltaic solar panels with an optional kit.

Domestic hot water
DHW

DHW With Aquarea you can also heat your domestic hot water at a very low cost with the optional hot water cylinder.

Easy control by BMS
CONNECTIVITY

Connectivity. The communication port is integrated into the indoor unit and provides easy connection to, and control of, your Panasonic heat pump to your home or building management system.

Internet Control Ready
INTERNET CONTROL

Internet Control is a next generation system providing a user-friendly remote control of air conditioning or heat pump units from everywhere, using a simple Android or iOS smartphone, tablet or PC via internet.

5 year compressor warranty

5 Years Warranty. We guarantee the compressors in the entire range for five years.

New solutions



Aquarea High Performance for low consumption houses. From 3 to 16 kW

For a house with low temperature radiators or under-floor heating, our high performance Aquarea HP is a good solution. This solution can work as a stand-alone unit or can be combined with an existing gas- or oil-fired heating system depending on requirements. This new solution is ideal for low consumption homes.



Aquarea T-CAP. From 9 to 12 kW

If the most important aspect is to maintain nominal heating capacities even at temperatures as low as -7 °C or -20 °C*, select the Aquarea T-CAP. This ensures that there is always enough capacity to heat the house without help from an external boiler – even at extremely low temperatures. Aquarea T-CAP always has high efficiency and high heating capacity even at extremely low temperatures. With Aquarea T-CAP, you can always enjoy high savings.

* May need the backup heater to maintain the capacity from -15 degrees.



Aquarea HT. From 9 to 12 kW

For a house with traditional high-temperature radiators (such as cast iron radiators), the Aquarea HT Solution is the most appropriate as the Aquarea HT provides output water temperatures of 65 °C even at -20 °C. Aquarea HT is able to deliver hot water to 65 °C with the Heat Pump alone.

Why air source heat pumps?

- Reduced heating bills and maintenance costs
- **Savings of up to £1,100 a year are possible²**
- Reduce your carbon footprint
- Simple to integrate into most heating systems
- Energy efficient alternative to oil, LPG and electric systems
- Highly compatible with other energy efficient energy sources eg solar panels


Up to 78% energy savings*

Panasonic's Aquarea Heat Pump provides savings of up to 78% on heating expenses compared to electrical heaters. For example, the Aquarea 9 kW system has a COP of 4.74. This is 3.74 kW more than a conventional electrical heating system which has a maximum COP of 1. This is equivalent to a 78% saving. Consumption can be further reduced by connecting photovoltaic solar panels to the Aquarea system.

Air source heat pumps – Quick facts

- Provides sustainable heating, cooling and hot water for your home
- 30%-40% reduction in annual energy bills²
- Ideal for properties without access to mains gas
- Operates even in freezing temperatures (-20 °C).
- Externally positioned saving valuable internal living space
- Proven technology from Panasonic and already well established in other EU countries

1 Only for the 3 kW.
2 When compared to Oil and LPG heating systems. Subject to conditions.

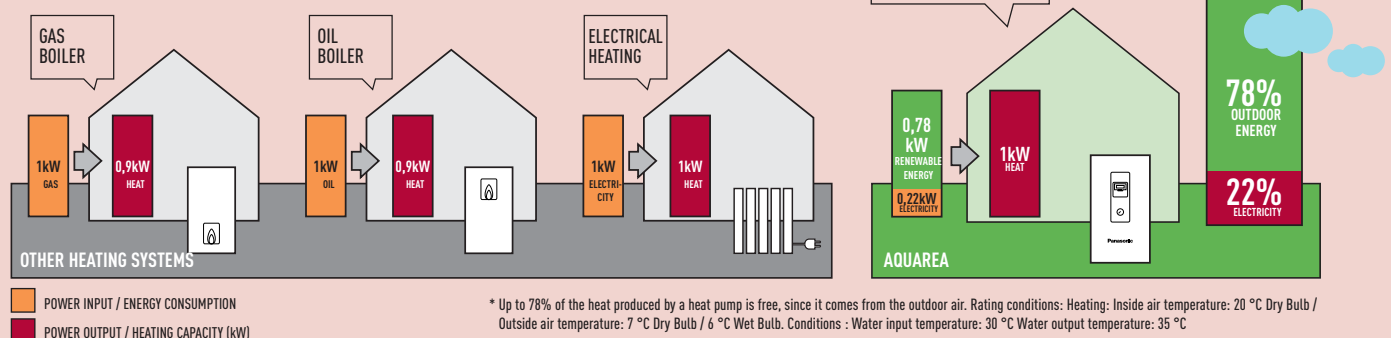



“Green” High-efficiency heating with Panasonic’s new Air to Water Heat Pump Systems

At the forefront of energy innovation, Aquarea is resolutely positioned as a “green” heating and air-conditioning system.

Aquarea is part of a new generation of heating and air-conditioning systems that use a renewable, free energy source – the air – to heat or cool the home and to produce hot water. The Aquarea heat pump is a much more flexible and cost-effective alternative to a traditional fossil fuel boiler.

An ideal heating solution for both new and old properties:

- A wide range from 3 to 16 kW, single and Three Phase, Mono-Bloc and Bi-Bloc
- 3 Versions:
 - Aquarea High Performance. From 3 to 16 kW
 - Aquarea T-CAP. From 9 to 12 kW
 - Aquarea HT. From 9 to 12 kW
- The High-efficiency Heat Pump which operates at outside temperatures as low as -20 °C
- Reduces energy costs with its COP of 4.74¹

- Reduces energy consumption and CO₂ emissions
- Provides cooling in summer
- Highly flexible:
 - Connects to an existing heating system
 - Connects to photovoltaic solar panels

We are surrounded by an endless supply of free energy: supplied by the sun and present in all spheres of our environment, the air, the ground, the groundwater...

Heat pumps enable us to recover this free, inexhaustible energy and to harness its power to heat our homes. These systems have the huge advantage, apart from reducing your electricity bill, of saving fossil fuels and at the same time limiting greenhouse gas emissions².

Thus, Panasonic’s Aquarea system is an air/water heat pump system that uses energy from the outdoor air and transmits them via a heat exchanger to the water used to heat your home in winter, in addition, some Aquarea models can even be used to cool your house in summer time and produce hot water all year round.

1. COP: energy efficiency in heating mode. COP of 4.74 for the 9kW WH-MDF09C9E8 or WH-UD09CE8 models at an outside temperature of 7 °C, and for water, input and output temperatures of 30 °C and 35 °C (according to EN 14511-2).

2. We note that ADEME (French environmental and energy management agency) encourages consumers to choose heating and cooling systems that use heat pump systems.




Panasonic has designed a completely new line-up to give the best to our customers

There are several types of heat pump available:


The Mono-Bloc system

This only has an outdoor unit. The installation doesn't require a refrigerated connection and is only connected to the heating system.

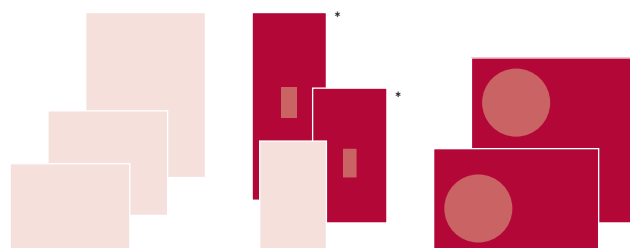

The Bi-Bloc system

This system is made up of an outdoor unit and a hydraulic module, normally located in the utility room or garage.

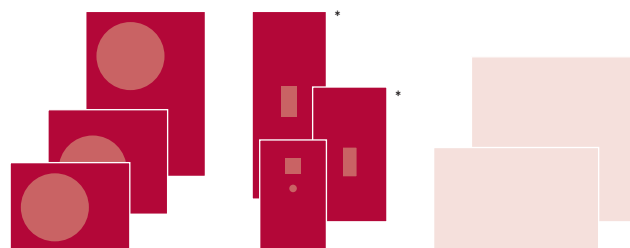


* Tank Optional



SEASONAL EFFICIENCY
 PRODUCT READY FOR THE NEW ErP ECODESIGN REQUIREMENTS LOT 1

How does the Aquarea system work ?


An air to water heat pump system uses heat energy present in the outdoor air to heat the house, cool it and also to produce hot water. The Aquarea system therefore uses free energy to heat or cool your home. It only consumes electricity to operate the compressor, the electronics, the pumps and in the event of very low temperatures, the electric elements. The result is very high efficiency and real energy savings.

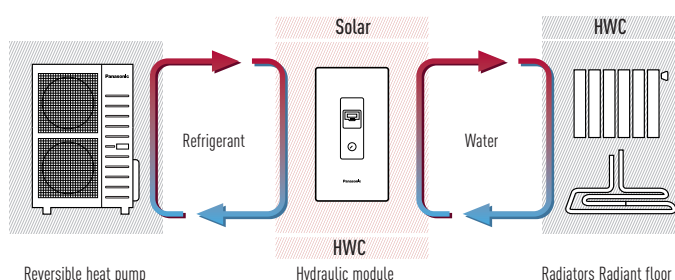

Example : with split-system

The Aquarea heating and hot water system

The sustainable alternative to oil, LPG & Electric heating systems.

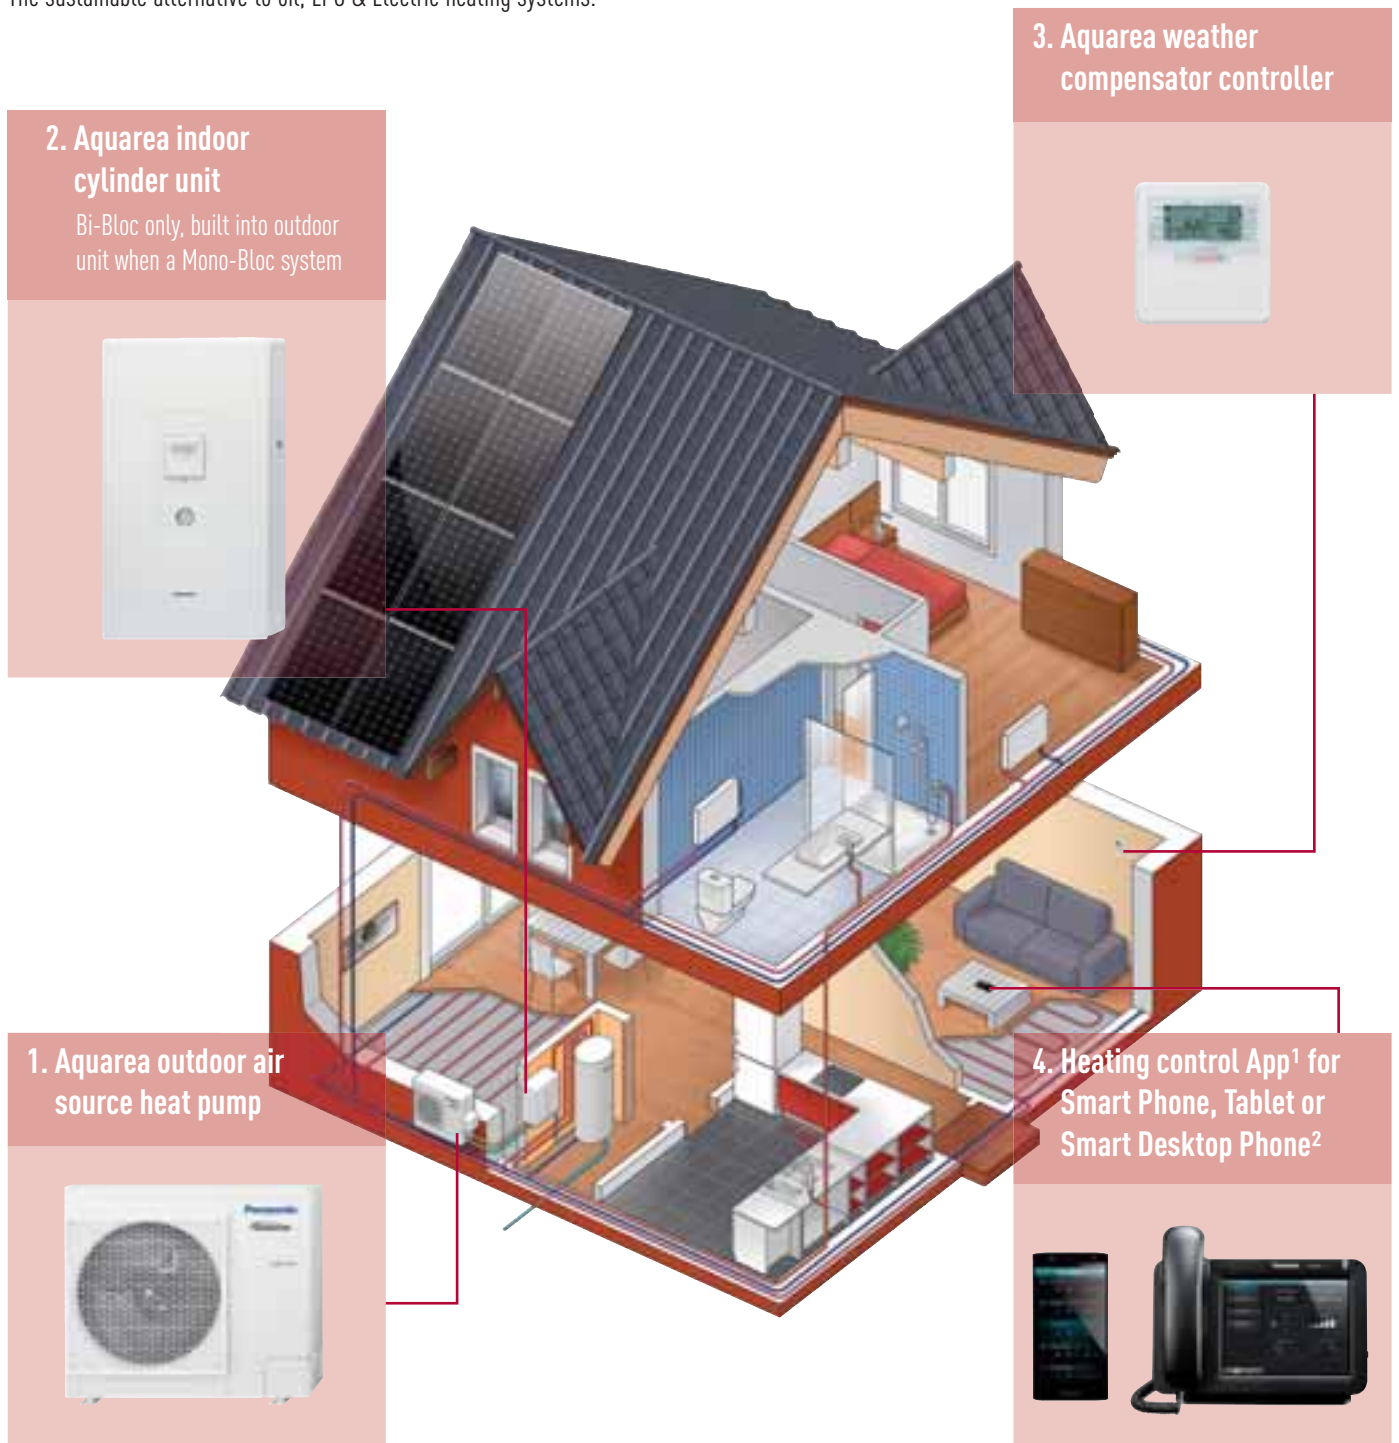

2. Aquarea indoor cylinder unit

Bi-Bloc only, built into outdoor unit when a Mono-Bloc system



3. Aquarea weather compensator controller



1. Aquarea outdoor air source heat pump



4. Heating control App¹ for Smart Phone, Tablet or Smart Desktop Phone²



1. Aquarea outdoor air source heat pumps

Panasonic has developed an extensive range of Air To Water heat pumps designed to efficiently convert free air into sustainable heating and hot water.

Fitted externally to your home and designed to operate in all year round weather conditions (-20 °C), it's the smart alternative to oil, LPG and electric heating systems.

2. Aquarea indoor cylinder unit

Using the latest technology and energy efficient installation the indoor cylinder unit provides constant hot water for domestic use.

3. Aquarea weather compensator controller

Built-in weather compensator allows accurate control of the inside temperature of the house based on the outdoor temperature.

4. Heating control App¹ for Smart Phone, Tablet or Smart Desktop Phone²


The heating control App allows you to control the heating and hot water system via your smart phone, tablet or computer with the same ease as if you were at home.

1. Optional.
2. KX-UT670 Smart Desktop Phone from Panasonic.

Aquarea T-CAP and High Performance comparison

Aquarea T-CAP maintains the nominal capacity until -15 °C (example for 12 kW)

Aquarea T-CAP and High Performance have extremely high efficiency even at -15 °C

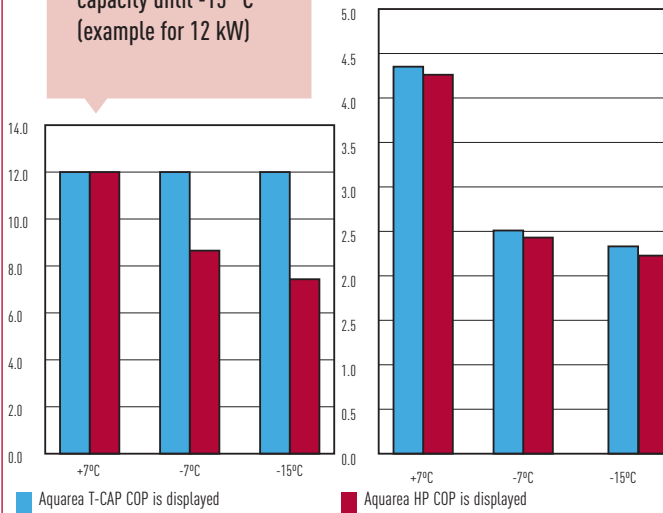

Conditions : Water input temperature: 30 °C. Water output temperature: 35 °C; outside temperature: +7 °C.

“We expect to save around 1,000 € a year on fuel costs and we’ve been able to get rid of a large ugly oil tank in the garden thanks to the new Aquarea.”

Aquarea Customer, Surrey¹



* Information provided by Aquarea customer, August 2012.



HIT Photovoltaic solar panel from Panasonic

Heat Pump + Photovoltaic

Photovoltaic solar panels: the best solution for big savings

Panasonic Aquarea Heat Pumps can easily be integrated with photovoltaic solar panels in order to achieve maximum energy savings, cut fuel bills, and to reduce CO₂ emissions.

Photovoltaic solar panels for even more savings

Combining photovoltaic solar panels with your heat pump can help to further reduce your electrical consumption and CO₂ emissions. Additionally, with the unique HIT photovoltaic solar panel technology from Panasonic, you can produce more electricity per square meter, helping you to increase your energy savings still further.

HIT cell technology

The Panasonic HIT (Heterojunction with Intrinsic Thin layer) solar cell is made of a thin mono crystalline silicon wafer surrounded by ultra-thin amorphous silicon layers. This product provides the industry’s leading performance and value using state-of-the-art manufacturing techniques.

Environmentally-Friendly Solar Cell

More Clean Energy. HIT can generate more clean Energy than other conventional crystalline solar cells.



What makes the Air to Water Heat Pump work

- The outdoor unit: this captures the free energy from the outdoor air and brings it into the house by means of the hydraulic module. This free energy is transported to the hydraulic module using an environmentally-friendly refrigerant gas with a high thermal exchange coefficient (R410A).
- Via the hydraulic module, with control panel, the temperature inside the house can be controlled and efficiency maximised. It has a heat exchanger which transmits the energy contained in the refrigerant coming from the outdoor unit to the water used for the home's heating and hot water.

The hydraulic module manages priorities in terms of heating and hot water production.

In the case of the Bi-Bloc system, this hydraulic module is situated inside the property, and it is in the outdoor unit in the Mono-Bloc system.

- The hot water cylinder heats the hot water. It is made of stainless steel, which guarantees it a very long life. It is also fitted with a 3 kW element to ensure maximum comfort when outdoor temperatures are very low. The heater, situated at the top of the cylinder, guarantees maximum efficiency and faster heat-up. A 3-way valve for the hot water cylinder connection is supplied with the hot water cylinder.
- Other necessary or optional features (not provided by Panasonic):
 - Room temperature thermostat, which can be connected to the Aquarea system to ensure optimum room temperature conditions.
 - Solar kit, to connect photovoltaic solar panels for even greater efficiency.
- A 3 kW immersion heater is included within the hot water tank to ensure:
 - Maximum comfort
 - Maximum efficiency and more for ensure protection against the legionella virus

Two or three earth leakage cut-outs

The Aquarea hydraulic module has differential cut-off ensuring maximum safety in the event of a short circuit:

- 2 differential cut-outs: 3 and 5 and 6 and 9 kW
- 3 differential cut-outs: 12, 14 and 16 kW







The control panel

The control panel allows accurate temperature control based on the outdoor temperature, providing maximum efficiency and comfort. The control panel controls the heating temperature and the hot water cylinder temperature very simply.


The hydraulic module

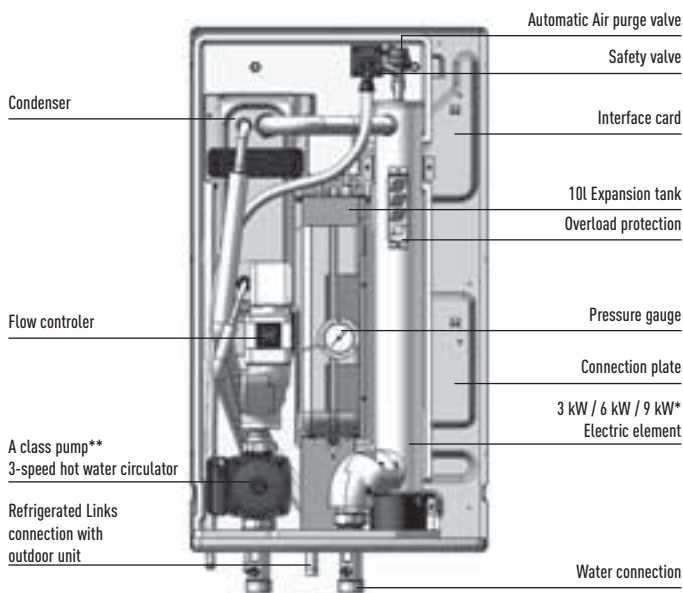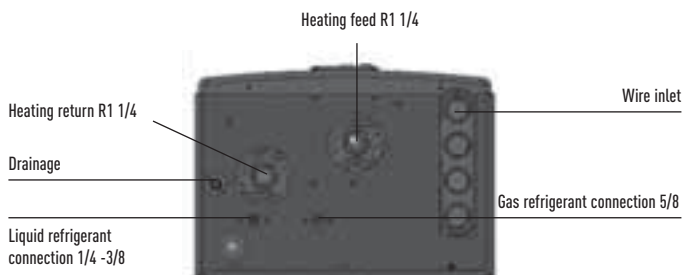

* 3 kW for 7 and 9 kW, 6 kW for 12, 14, 16 kW Single Phase
 9 kW for 12, 14, 16 kW Three Phase
 ** only 3/5/6 kW

Easy programming of the control panel

The primary circuit temperature is controlled based on the outdoor temperature. The control parameters are adjusted through the remote control during the commissioning of the system as is shown in the diagram below. Your heating specialist must also select the type of operation you need: heating priority or hot water cylinder priority.

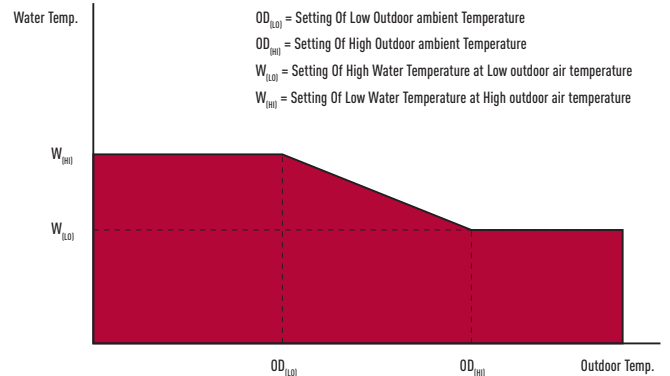

Easy reading of control of water pressure





Down to
-25 °C in
heating mode
OUTDOOR
TEMPERATURE




DESIGNED
**FOR LOW
CONSUMPTION**
HOMES

New Aquarea 3 and 5 kW Bi-Bloc and 6 and 9 kW Mono-Bloc Air to Water Heat Pump

Maximum savings, Maximum efficiency, Minimum CO₂ emissions, Minimum of space

Panasonic has designed the new Aquarea Bi-Bloc and Mono-Bloc heat pumps for homes which have high performance requirements. Whatever the weather, Aquarea will always give you maximum efficiency, even at -25 °C! The New Aquarea is easy to install on new or existing installations, in all types of properties.

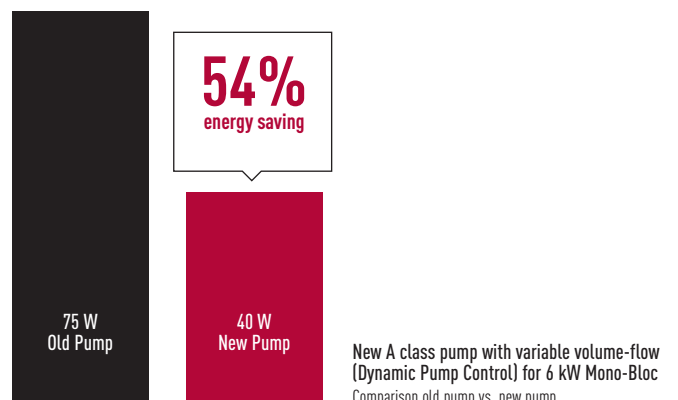


3/5 AND 6/9 kW DESIGNED FOR LOW CONSUMPTION HOMES

MAXIMUM SAVINGS, MAXIMUM EFFICIENCY,
MINIMUM CO₂ EMISSIONS, MINIMUM OF SPACE

Heating capacity adapted to the low consumption houses and passiv' houses

- Flat capacity! No need of oversized heat pump to heat the house at -7 °C a 3 kW or 5 kW is enough!

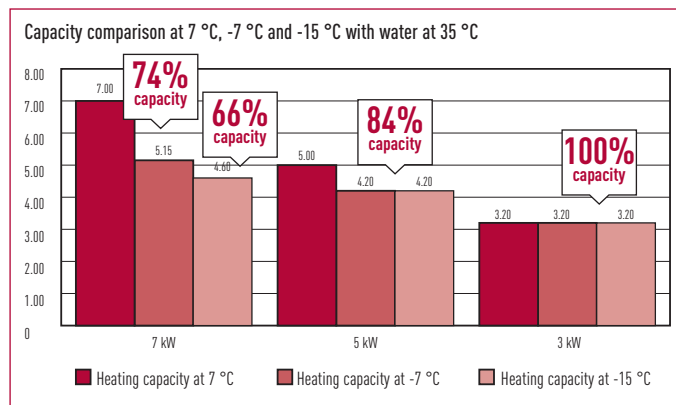

- No Backup heater needed to maintain the capacity at -7 °C, High efficiency guaranty even at -7 °C
- Low consumption due to small compressor size of the R2 rotary.

Technical benefits

- Super efficient: COP of 5 in the 3.2 kW!
- A Class Pump
- Special software for low consumption homes with minimum output temperature: 20 °C
- Works down to -25 °C for the 3 and 5 kW (-20 °C for the 6 and 9 kW)
- Automatic Air purge valve

Technical elements


Mono-Bloc unit includes:

- Heat exchanger
- Variable speed pump
- 6 litre expansion vessel
- Safety valve




COP comparison

Electrical heater with Panasonic Heat Pump.

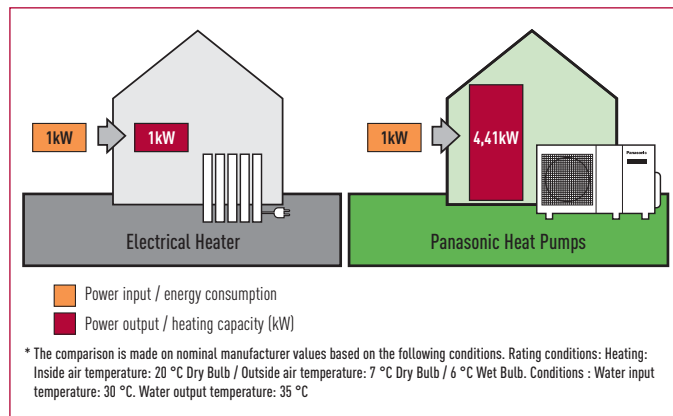


Bi-Bloc application Examples

Low Consumption Homes + Sanitary Hot Water + Hydraulic Switch

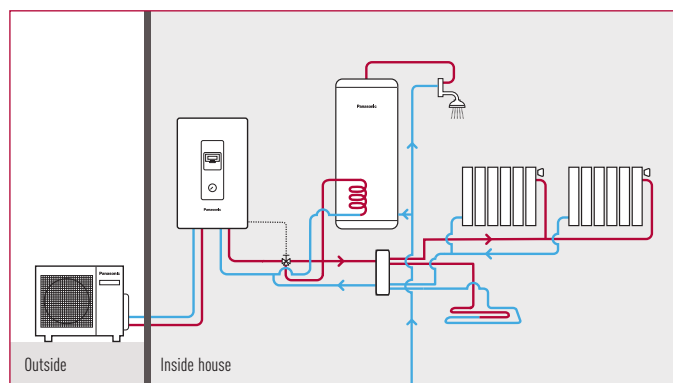


Mono-Bloc application Examples

Heating + Sanitary Hot Water

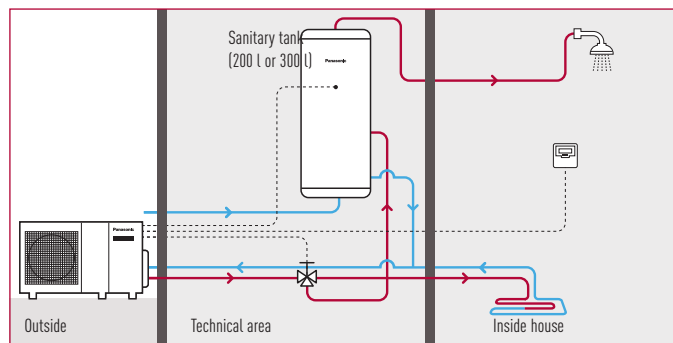

Heating Plug and Play System

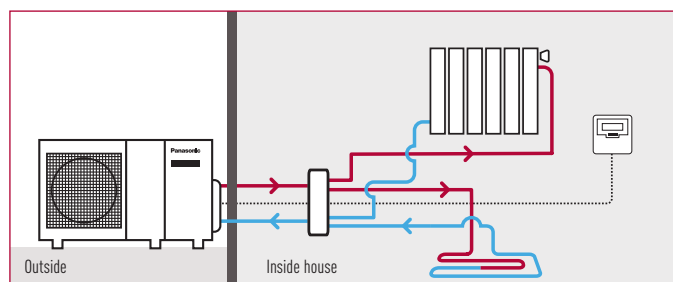

OPTIONAL



With or without built-in display



External touch display available

NEW

Control & connectivity

Aware of the importance of both control and connectivity in offering the best comfort at the lowest price, Panasonic offers its customers cutting-edge technology, specially designed to ensure a maximum performance of our Aquarea heat pump systems. You can properly manage the heat pump and perform an exhaustive monitoring and control, with all of the features the remote control provides at home, from anywhere in the world thanks to the internet applications Panasonic has created for you.



READY STEADY GO

Easy Installation & Easy Configuration

Ready: Pre-programmed with up to 160 applications/system diagrams

Steady: At start up - state the number of application/system diagram

Go: The controller starts working according to selected diagram

The next generation of Aquarea Manager

A new generation of smart controllers for eco-efficient heating. Versatile stand-alone controller for heating and domestic hot water.

Panasonic offers:

Trends. Statistics. Consumption Energy Management-Optimization. Alarm. Handling + Maintenance. Complete documentation etc.


Technical Specification

2 x Mixed Heating Circuits

- Floor screed dry program
- Cascade/bivalent controller
- Automatic switch from heat to cool mode
- Photovoltaic / Smart Grid contact
- Night shift: - Internal Energy Manager. - Trend
- Solar collector control
- DHW priority
- Web-control
- Up to 10 languages
- Ready, Steady, Go!: With up to 155 preconfigured system diagrams.
- Ready to operate in less than 3 minutes
- Easy to startup – easy to operate
- 230 V power supply
- 7 output relays
- 2 x 0..10 V output
- 8 Sensor inputs (PT1000)
- Built-in backlit text display
- USB interface (upload, service, remote control, trend)
- RS485 interface (com. with additional heat pump)
- RS485 interface (for external display)
- External touch display available
- Large Amount of External remote control units

Easy mounting


Simple mounting without screws in the cabinet/door or on DIN-rail. Also possible to mount directly on to the wall.



Control your heat pump from wherever you are at home. Control your comfort and efficiency with the lowest energy consumption



Modbus®

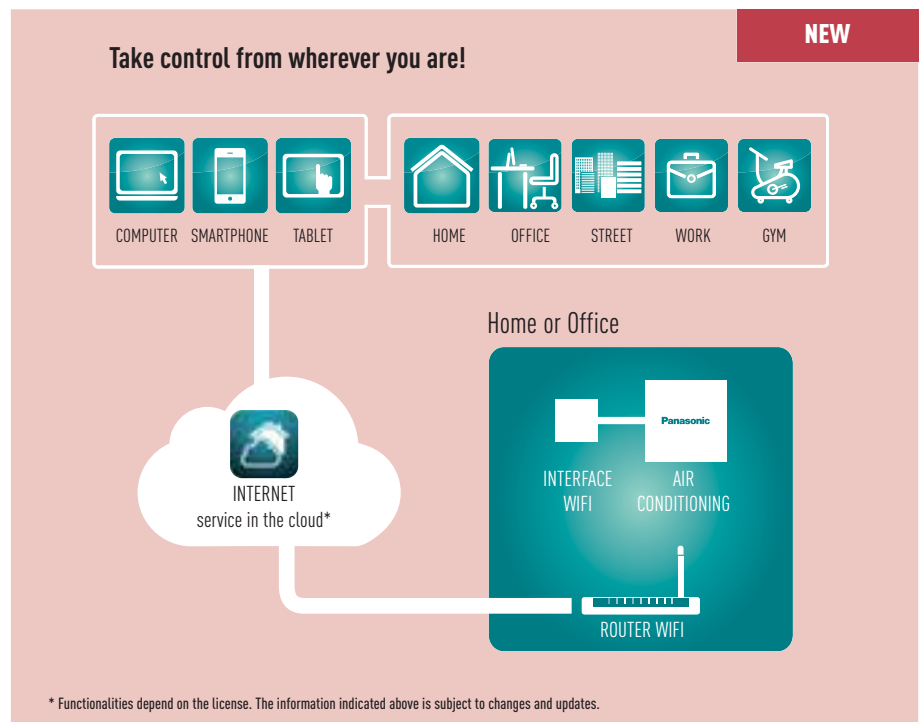

What's Internet Control?

Internet Control is a next generation system providing a user-friendly remote control of air conditioning or heat pump units from everywhere, using a simple Android or iOS smartphone, tablet or PC via internet.

Simple Installation

Just connect the Internet Control device to the air conditioner or heat pump with the supplied wire and then link it to your WIFI Access point.

Internet Control. Easy to install. Maximum benefit

Internet Control is underlined with the slogan "Your home in the cloud", meaning a simple and easy to handle solution has been considered for every user to manage the device, not requiring any communication or computer skills.

No servers. No adaptors. No wires. Just a small box is needed to be connected and placed close to the air conditioning indoor unit... and your smartphone, tablet or PC.

Your existing WiFi connection does the rest when you are at home. Start the App from your smartphone device, your tablet or your computer, and enjoy a new experience in comfort. And if you are out of home, just launch the App, and manage the air conditioning of your home from the cloud. An intuitive and user-friendly application on the screen of your smartphone or PC that lets you manage the air conditioning unit in the same way you do with the remote controller at home.

Internet Control can be downloaded in Apple's AppStore and Android's PlayStore.

Control your air conditioning with the smart internet control device via smartphones, tablet, PC and smart desktop phone via internet

Offering the same functions as if you were at home or office: start/stop, Mode Operation, Set Temperature, Room Temperature etc as well as the new, advanced functionality provided by Internet Control to achieve the best comfort and efficiency with the lowest energy consumption.



Study Case. Helen, freelancer

"I was sick of heating my house in the mountains on the weekends when I couldn't go. It was a pointless and annoying expense. But now, with Internet Control, I've managed to put the rigidity of weekly programming behind me. If I go then I just put my Panasonic Aquarea heating system on. And if I don't go then I go to the cinema or the theatre with the money I've saved."

New Panasonic R2 Rotary Compressor

Panasonic Rotary Compressors for Room Air Conditioners have been installed in the most demanding environments around the world. Designed to withstand extreme conditions, Panasonic Rotary delivers high-performance, efficiency and reliable service, no matter where you are. Panasonic, the world's largest manufacturer of rotary compressors.

Making the world a cooler place since 1978.



Why Panasonic R2 Rotatory Compressor is so efficient?



- 1 High Efficiency Motor** The premium silicon steel motor meets industry efficiency requirements.
- 2 High Volume Oil Pump Improved Lubrication** The extended, high volume oil pump in conjunction with a larger capacity oil reservoir provides superior lubrication.
- 3 Accumulator Larger Refrigerant Capacity** The larger accumulator accommodates generous refrigerant amounts needed in longer line length installations.

R2 Compressor Value

About R2 Compressor

Built upon 28 years of compressor design and production experience, R2 is the next generation of Rotary Compressors for residential central air conditioning. New technology improvements, enhanced materials and simple design ensure R2 compressors are reliable, efficient and quiet. R2 Compressor deliver quality, comfort and peace of mind homes around the world.

Panasonic's Rotary Compressors have been life tested in some of the world's most demanding environments. Proven for years in the the most demanding area of the wold, the R2 design is the compressor of choice by contractors and homeowners in these challenging climates. For the performance homeowners demand, R2 Rotary Compressors are the best air conditioning engines for today's residential cooling solutions.

Leading Technology

Used in over 80% of cooling solutions globally, rotary is the world's dominant residential air conditioning compression technology. Panasonic is the leading rotary and residential AC compressor manufacturer in the world, with over 200 milion compressor produced.

Benefits

Central air conditioning delivered with a Panasonic R2 Rotary Compressor ensures a superior level of comfort at an economical cost.



Vane - Long Life

The special Physical Vapor Deposition (PVD) coating applied to the Vane greatly enhances the durability and life of the compressor mechanism.

Piston - Durable

The piston is made of unique high-grade steel metallurgy that prevents wear and operation life.



R2 Compressors:

- Higher efficiency
- Single and Dual Piston
- R-410A refrigerant
- Compact size

R2 rotary compressors utilize rolling piston technology.



The R2 compressor has been tested usefully in extreme conditions.



FAQ

How does a Panasonic Rotary compressor work?

R2 compressors are rolling piston rotary compressors. The heart of the rotary compressor is the cylinder which houses the piston and the vane. The vane maintains constant contact with the piston as the piston rolls along the inside wall of the cylinder. As the piston rotates, gas is compressed into an increasingly smaller area until the discharge pressure is reached, releasing gas into the shell chamber. At the same time, more gas comes in through the suction port, enabling a continuous process of suction and discharge. The simple design and symmetry of the cylinder components, combined with a special coating and premium materials, provide a highly durable and reliable product, rotation after rotation.

What SEER range do Panasonic Rotary compressor support?

R2 compressors are in the latest technology air conditioning products with the highest efficiency products on the market today. Our R2 compressors are engineerd specifically for this efficiency requirement, which combined with the inherent simple design of the rotary, results in a highly desirable and economical solution.

What makes Panasonic Rotary compressor so reliable?

Changes to the construction and material of internal components enables the R2 compressor to reliably operate with an above average maximum discharge

pressure. A Physical Vapor Deposition (PVD) coating on the vane along with enhanced steel materials significantly reduces wear and increases durability.

What makes Panasonic Rotary compressor so quiet?

The structure of the R2 compressor mechanism has been redesigned to increase stability and reduce vibration. Specifically, the compressor has an upper cylinder discharge, an enhanced fixed upper bearing, and reduced friction in the cylinder parts. The lower discharge and muffler in dual piston compressors also enables lower noise levels. As a result, this new design optimises efficiency and minimises noise.

How do R2 rotary compressors compare to scroll and reciprocating compressors?

R2 rotary compressors are very similar to some scroll compressors in overall performance, including efficiency and reliability. The simple and symmetrical key components contribute to the R2 compressor's reliability, light weight and compact size, and economical applied cost, without sacrificing the key performance requirements of high efficiency and low noise levels.

What refrigerants can be used with Panasonic Rotary compressor?

Panasonic has R2 Rotary Compressors available for R410A applications.

Aquarea Line-Up!



FIGURE 1 (F1)



FIGURE 2 (F2)



FIGURE 3 (F3)



FIGURE 4 (F4)

Line up			3 kW	5 kW	6 kW	7 kW	9 kW	12 kW	
Aquarea High Performance for well insulated houses	Bi-Bloc	Single Phase	Heating only	WH-SDF03E3E5 WH-UD03EE5 (F1)	WH-SDF05E3E5 WH-UD05EE5 (F1)		WH-SDF07C3E5 WH-UD07CE5-A (F3)	WH-SDF09C3E5 WH-UD09CE5-A (F3)	WH-SDF12C6E5 WH-UD12CE5-A (F4)
			Heating and cooling	WH-SDC03E3E5 WH-UD03EE5 (F1)	WH-SDC05E3E5 WH-UD05EE5 (F1)		WH-SDC07C3E5 WH-UD07CE5-A (F3)	WH-SDC09C3E5 WH-UD09CE5-A (F3)	WH-SDC12C6E5 WH-UD12CE5-A (F4)
		Three Phase	Heating only					WH-SDF09C3E8 WH-UD09CE8 (F4)	WH-SDF12C9E8 WH-UD12CE8 (F4)
			Heating and cooling					WH-SDC09C3E8 WH-UD09CE8 (F4)	WH-SDC12C9E8 WH-UD12CE8 (F4)
	Mono-Bloc	Single Phase	Heating only			WH-MDF06E3E5 (F2)		WH-MDF09E3E5 (F2)	WH-MDF12C6E5 (F5)
			Heating and cooling			WH-MDC06E3E5 (F2)		WH-MDC09E3E5 ¹ (F2)	WH-MDC12C6E5 (F5)
		Three Phase	Heating only					WH-MDF09C3E8 (F5)	WH-MDF12C9E8 (F5)
			Heating and cooling					WH-MDC09C3E8 (F5)	WH-MDC12C9E8 (F5)
Aquarea I-CAP for cold areas	Bi-Bloc	Single Phase	Heating only				WH-SXF09D3E5 WH-UX09DE5 (F4)	WH-SXF12D6E5 WH-UX12DE5 (F4)	
			Heating and cooling				WH-SXC09D3E5 WH-UX09DE5 (F4)	WH-SXC12D6E5 WH-UX12DE5 (F4)	
		Three Phase	Heating only					WH-SXF09D3E8 WH-UX09DE8 (F4)	WH-SXF12D9E8 WH-UX12DE8 (F4)
			Heating and cooling					WH-SXC09D3E8 WH-UX09DE8 (F4)	WH-SXC12D9E8 WH-UX12DE8 (F4)
	Mono-Bloc	Single Phase	Heating only					WH-MXF09D3E5 (F5)	WH-MXF12D6E5 (F5)
			Heating and cooling					WH-MXC09D3E5 (F5)	WH-MXC12D6E5 (F5)
		Three Phase	Heating only					WH-MXF09D3E8 (F5)	WH-MXF12D9E8 (F5)
			Heating and cooling					WH-MXC09D3E8 (F5)	WH-MXC12D9E8 (F5)
Aquarea HT for retrofit	Bi-Bloc	Single Phase	Heating only				WH-SHF09D3E5 WH-UH09DE5 (F4)	WH-SHF12D6E5 WH-UH12DE5 (F4)	
		Three Phase	Heating only				WH-SHF09D3E8 WH-UH09DE8 (F4)	WH-SHF12D9E8 WH-UH12DE8 (F4)	
	Mono-Bloc	Single Phase	Heating only					WH-MHF09D3E5 (F5)	WH-MHF12D6E5 (F5)
		Three Phase	Heating only					WH-MHF09D3E8 (F5)	WH-MHF12D9E8 (F5)

Low connectivity : control of 3 way valve, tank heater On/Off signal, tank thermostat signal reception, On/Off from external control, weekly timer. High connectivity : Low connectivity + solar panels connection, room thermostat connection.
 1 Available in November 2012.

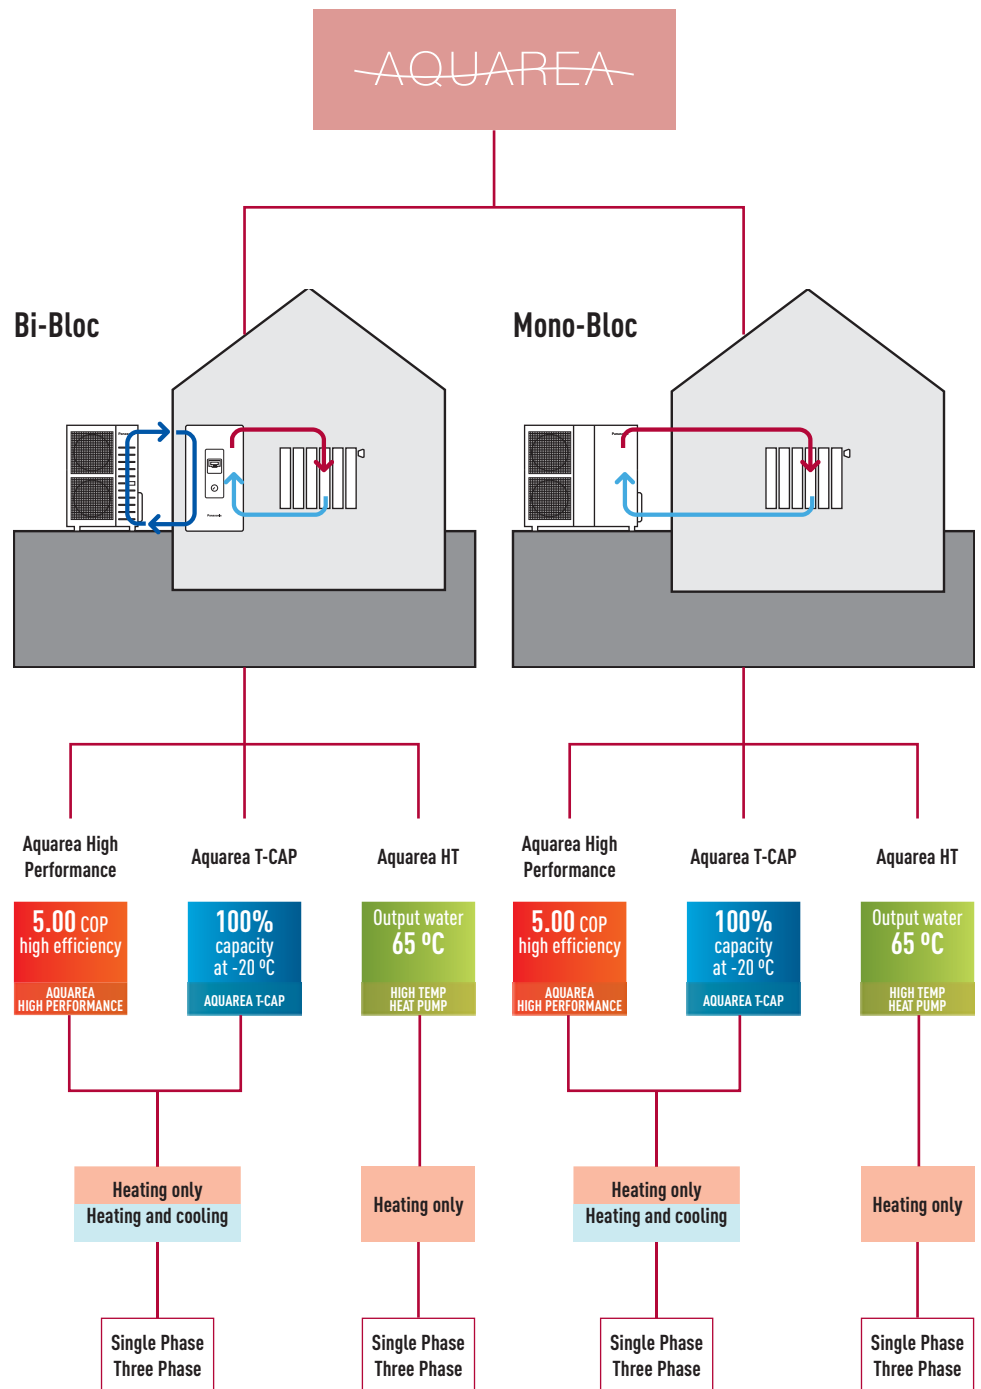


FIGURE 5 (F5)

SEASONAL EFFICIENCY

PRODUCT READY FOR THE NEW EIP ECODESIGN REQUIREMENTS LOT 1

14 kW	16 kW
WH-SDF14C6E5 WH-UD14CE5-A (F4)	WH-SDF16C6E5 WH-UD16CE5-A (F4)
WH-SDC14C6E5 WH-UD14CE5-A (F4)	WH-SDC16C6E5 WH-UD16CE5-A (F4)
WH-SDF14C9E8 WH-UD14CE8 (F4)	WH-SDF16C9E8 WH-UD16CE8 (F4)
WH-SDC14C9E8 WH-UD14CE8 (F4)	WH-SDC16C9E8 WH-UD16CE8 (F4)
WH-MDF14C6E5 (F5)	WH-MDF16C6E5 (F5)
WH-MDC14C6E5 (F5)	WH-MDC16C6E5 (F5)
WH-MDF14C9E8 (F5)	WH-MDF16C9E8 (F5)
WH-MDC14C9E8 (F5)	WH-MDC16C9E8 (F5)




AQUAREA
HIGH PERFORMANCE
 BI-BLOC SINGLE PHASE
 HEATING ONLY - SDF
 HEATING AND COOLING - SDC
 3 AND 5 kW



DESIGN FOR LOW CONSUMPTION HOMES

MAXIMUM SAVINGS, MAXIMUM EFFICIENCY,
 MINIMUM CO₂ EMISSIONS, MINIMUM OF SPACE
 PRODUCT READY FOR THE NEW ErP ECODESIGN
 REQUIREMENTS LOT 1



WH-UD03EE5
 WH-UD05EE5

The 3 and 5 kW is specially designed for low energy homes and achieves an impressive COP of 5 (on the 3.2 kW).

Thanks to the system's high degree of technology and advanced control, it is able to maintain a high capacity and efficiency even at -7 °C and -25 °C. The Aquarea's software is optimised to the requirements of low consumption homes in order to maximise energy efficiency. Whatever the weather, Aquarea will always give you maximum efficiency, even at -25 °C. The compact design of the outdoor unit makes installation very easy.

Technical focus

- **NEW!** Efficient control of room temperature based on the outdoor temperature, indoor temperature using the Aquarea Manager.
- Super efficient: COP of 5 in the 3.2 kW!
- A Class Pump
- Special software for low consumption homes with minimum output temperature: 20 °C
- Works down to -25 °C
- Automatic Air purge valve
- Display of the compressor frequency

Kit	Single Phase Heating Only		Single Phase Heating and Cooling	
	KIT-WF03CE5	KIT-WF05CE5	KIT-WC03CE5	KIT-WC05CE5
Indoor unit	WH-SDF03E3E5	WH-SDF05E3E5	WH-SDC03E3E5	WH-SDC05E3E5
Outdoor unit	WH-UD03EE5	WH-UD05EE5	WH-UD03EE5	WH-UD05EE5
Heating Capacity at +7 °C	kW 3.20	5.00	3.20	5.00
COP at +7 °C with heating water at 35 °C	5.00	4.63	5.00	4.63
Heating Capacity at -7 °C	kW 3.20	4.20	3.20	4.20
COP at -7 °C	2.69	2.59	2.69	2.59
Heating Capacity at -15 °C	kW 3.20	4.20	3.20	4.20
COP at -15 °C with heating water at 35 °C	2.30	2.16	2.30	2.16
Cooling capacity at 35 °C	kW -	-	3.20	4.50
EER at 35 °C with cooling water at 7/12 °C	-	-	3.08	2.69
Indoor unit				
Dimensions	H x W x D	mm 892 x 502 x 353	892 x 502 x 353	892 x 502 x 353
Weight	kg	43	43	44
Water pipe connector	mm	28	28	28
A class Pump	No. of Speed	7	7	7
	Input power (Max.)	W 25	29	25
Heating water flow [ΔT=5 K, 35 °C]	l/min	9.2	14.3	9.2
Capacity of integrated electric heater	kW	3	3	3
Input Power	kW	0.64	1.08	0.64
Running and Starting current	A	3	5	3
Current 1	A			
Current 2	A			
Current 3	A			
Recommended Fuse	A			
Recommended power cable section	mm ²			
Outdoor unit				
Sound pressure level	dB(A)	47	48	47
Sound power level	dB	65	66	65
Dimensions	H x W x D	mm 622 x 824 x 298	622 x 824 x 298	622 x 824 x 298
Weight	kg	39	39	39
Pipe diameter	Liquid	mm (Inch) 6.35 (1/4)	6.35 (1/4)	6.35 (1/4)
	Gas	mm (Inch) 12.7 (1/2)	12.7 (1/2)	12.7 (1/2)
Refrigerant (R410A)	kg	1.20	1.20	1.20
Pipe length range	m	3-15	3-15	3-15
Pipe length for nominal capacity	m	7	7	7
Pipe length for additional gas	m	10	10	10
Additional gas amount (R410A)	g/m	20	20	20
T/D&D/D Hight Difference	m	5	5	5
Operation range	Outdoor ambient	°C -25 to 35	-25 to 35	-25 to 35
Water outlet at -2/-7/-15	°C	20 - 55	20 - 55	20 - 55

COP classification is at 230 V only in accordance with EU directive 2003/32/EC. Sound pressure measured at 1 m from the outdoor unit and at 1.5 m height. Performance in agreement with EN14511.

Internet Control Ready

INTERNET CONTROL

5.00 COP high efficiency

AQUAREA HIGH PERFORMANCE

High efficiency heating

INVERTER+

Environmentally friendly refrigerant

R410A

Down to -25 °C in heating mode

OUTDOOR TEMPERATURE

Boiler connection

RETROFIT

Solar panels connection

SOLAR KIT

Domestic hot water

DHW

Easy control by BMS

CONNECTIVITY

5 year compressor warranty

AQUAREA
HIGH PERFORMANCE
BI-BLOC SINGLE PHASE /
THREE PHASE
HEATING ONLY - SDF
HEATING AND COOLING - SDC



SEASONAL EFFICIENCY
 PRODUCT READY FOR THE NEW ErP ECODESIGN REQUIREMENTS LOT 1

The Aquarea SDF / SDC range adapts well in an existing install with a boiler backup, and in a new application with underfloor heating, low temperature radiators or even fan-coil heaters. This range can also be connected to a solar kit in order to increase efficiency and minimize the impact on the ecosystem. Finally, it is possible to connect a thermostat for even better heating control (SDF) or better heating and cooling control (SDC) and management.

- Maximum hydraulic module output temperature: 55 °C
- Works down to -20 °C
- Maximum 40 m rise between the outdoor unit and the hydraulic module
- Cooling temperature range 5-20 °C (SDC)



Technical focus

- **NEW!** Efficient control of room temperature based on the outdoor temperature, indoor temperature using the Aquarea Manager.
- Optional Smartphone control
- Range from 7 to 16 kW, Single and Three Phase

Aquarea Manager for all Aquarea.



	Single Phase (Power to indoor)					Three Phase (Power to indoor)					
	KIT-WF07CE5	KIT-WF09CE5	KIT-WF12CE5	KIT-WF14CE5	KIT-WF16CE5	KIT-WF09CE8	KIT-WF12CE8	KIT-WF14CE8	KIT-WF16CE8		
Kit Heating Only											
Kit Heating and Cooling	KIT-WC07CE5	KIT-WC09CE5	KIT-WC12CE5	KIT-WC14CE5	KIT-WC16CE5	KIT-WC09CE8	KIT-WC12CE8	KIT-WC14CE8	KIT-WC16CE8		
Indoor unit Heating Only	WH-SDF07C3E5	WH-SDF09C3E5	WH-SDF12C6E5	WH-SDF14C6E5	WH-SDF16C6E5	WH-SDF09C3E8	WH-SDF12C9E8	WH-SDF14C9E8	WH-SDF16C9E8		
Indoor unit Heating and Cooling	WH-SDC07C3E5	WH-SDC09C3E5	WH-SDC12C6E5	WH-SDC14C6E5	WH-SDC16C6E5	WH-SDC09C3E8	WH-SDC12C9E8	WH-SDC14C9E8	WH-SDC16C9E8		
Outdoor unit	WH-UD07CE5-A	WH-UD09CE5-A	WH-UD12CE5-A	WH-UD14CE5-A	WH-UD16CE5-A	WH-UD09CE8	WH-UD12CE8	WH-UD14CE8	WH-UD16CE8		
Heating Capacity at +7 °C with heating water at 35 °C	kW	7.0	9.0	12.0	14.0	16.0	9.0	12.0	14.0	16.0	
COP at +7 °C with heating water at 35 °C		4.40	4.10	4.67	4.50	4.23	4.74	4.67	4.50	4.23	
Heating Capacity at +2 °C with heating water at 35 °C	kW	6.55	6.70	11.40	12.40	13.00	9.00	11.40	12.40	13.00	
COP at +2 °C with heating water at 35 °C		3.30	3.10	3.40	3.32	3.25	3.53	3.40	3.32	3.25	
Heating Capacity at -7 °C with heating water at 35 °C	kW	5.15	5.90	10.00	10.70	11.40	9.00	20.00	10.70	11.40	
COP at -7 °C with heating water at 35 °C		2.65	2.50	2.70	2.62	4.47	2.81	2.70	2.62	2.55	
Heating Capacity at -15 °C with heating water at 35 °C	kW	4.60	5.90	8.90	9.50	10.30	8.30	8.90	9.50	10.30	
COP at -15 °C with heating water at 35 °C		2.30	2.20	2.18	2.35	2.33	2.55	2.43	2.35	2.33	
Cooling capacity at 35 °C with cooling water at 7 °C ¹	kW	6.00	7.00	10.00	11.50	12.20	7.00	10.00	11.50	12.20	
EER at 35 °C with cooling water at 7 °C ¹		2.61	2.41	2.78	2.61	2.54	3.11	2.82	2.61	2.54	
Indoor unit											
Dimensions	H x W x D	mm	892 x 502 x 353	892 x 502 x 353	892 x 502 x 353	892 x 502 x 353	892 x 502 x 353	892 x 502 x 353	892 x 502 x 353	892 x 502 x 353	
Weight		kg	43 (45 ¹)	43 (45 ¹)	49 (51 ¹)	49 (51 ¹)	50 (51 ¹)	51 (52 ¹)	51 (52 ¹)	51 (52 ¹)	
Water pipe connector			R1 1/4	R1 1/4	R1 1/4	R1 1/4	R1 1/4	R1 1/4	R1 1/4	R1 1/4	
Pump	No. of Speed		3	3	3	3	3	3	3	3	
	Input power (Max.)	W	100 (75 ¹)	100 (75 ¹)	190	190	190	190	190	190	
Heating water flow (ΔT=5 K, 35 °C)		l/min	20.1	25.8	34.4	40.1	45.9	25.8	34.4	40.1	45.9
Capacity of integrated electric heater		kW	3	3	6	6	6	3	9	9	
Input Power	Heating / Cooling ¹	kW	1.59 / 2.30	2.20 / 2.90	2.57 / 3.60	3.11 / 4.40	3.78 / 4.80	1.90 / 2.25	2.57 / 3.55	3.11 / 4.40	3.78 / 4.80
Running and Starting current	Heating / Cooling ¹	A	7.30 / 10.40	10.10 / 13.10	11.70 / 16.10	14.10 / 19.70	17.10 / 21.50	2.90 / 3.40	3.90 / 5.30	4.70 / 6.60	5.70 / 7.20
Current 1 / Current 2 / Current 3		A	21.0 / 26.0 / -	22.9 / 26.0 / -	24.0 / 26.0 / 13.0	25.0 / 26.0 / 13.0	26.0 / 26.0 / 13.0	11.8 / 13.0 / -	8.8 / 13.0 / 13.0	9.4 / 13.0 / 13.0	9.9 / 13.0 / 13.0
Recommended Fuse		A									
Recommended power cable section		mm ²									
Outdoor unit											
Sound pressure level		dB(A)	48	49	50	51	53	49	50	51	53
Sound power level		dB	66	67	67	68	70	65	66	71	68
Dimensions / Weight	H x W x D	mm / kg	795 x 900 x 320 / 66			1340 x 900 x 320 / 106					
Pipe diameter	Liquid / Gas	mm (Inch)	6.35 (1/4) / 15.88 (5/8)			9.52 (3/8) / 15.88 (5/8)					
Refrigerant (R410A)		kg	1.45	1.45	2.75	2.75	2.75	2.75	2.75	2.75	
Pipe length range		m	3 - 30	3 - 30	3 - 40	3 - 40	3 - 40	3 - 40	3 - 40	3 - 40	
Pipe length for nominal capacity		m	7	7	7	7	7	7	7	7	
Pipe length for additional gas		m	10	10	30	30	30	30	30	30	
Additional gas amount (R410A)		g/m	30	30	50	50	50	50	50	50	
I/D & O/D Height difference		m	20	20	30	30	30	30	30	30	
Operation range	Outdoor ambient	°C	-20 to 35	-20 to 35	-20 to 35	-20 to 35	-20 to 35	-20 to 35	-20 to 35	-20 to 35	
Water outlet at -2/-7/-15	Heating / Cooling ¹	°C	25 - 55 / 5 - 20	25 - 55 / 5 - 20	25 - 55 / 5 - 20	25 - 55 / 5 - 20	25 - 55 / 5 - 20	25 - 55 / 5 - 20	25 - 55 / 5 - 20	25 - 55 / 5 - 20	

COP classification is at 230 V only in accordance with EU directive 2003/32/EC. Sound pressure measured at 1 m from the outdoor unit and at 1.5 m height. Performance in agreement with EN14511. 1. Specifications for Heating and Cooling models.

Internet Control Ready

INTERNET CONTROL

4.74 COP high efficiency

AQUAREA HIGH PERFORMANCE

High efficiency heating

INVERTER+

Environmentally friendly refrigerant

R410A

Down to -20 °C in heating mode

OUTDOOR TEMPERATURE

Boiler connection

RETROFIT

Solar panels connection

SOLAR KIT

Domestic hot water

DHW

Easy control by BMS

CONNECTIVITY

5 year compressor warranty

INTERNET CONTROL READY: Optional.

AQUAREA T-CAP
BI-BLOC SINGLE PHASE /
THREE PHASE
HEATING ONLY - SXF
HEATING AND COOLING - SXC



SEASONAL EFFICIENCY
 PRODUCT READY FOR THE NEW ErP ECODESIGN REQUIREMENTS LOT 1



WH-UX09DE5 WH-UX09DE8
 WH-UX12DE5 WH-UX12DE8

The new SXF / SXC is ideal for residential properties which don't have an external boiler and require a maintained capacity level.

T-CAP stands for Total Capacity. This new line-up is able to maintain the same nominal capacity even at -20 °C¹ without the help of an electrical booster heater. T-CAP is also able to provide extremely high efficiency, whatever the outside temperature or the water temperature. The SXF / SXC adapts well in an existing install with a boiler backup, and in a new application with underfloor heating, low temperature radiators or even fan-coil heaters. This Range can also be connected to a solar kit in order to increase efficiency and minimize the impact on the ecosystem. Finally, it is possible to connect a thermostat for even better heating control (SXF) or better heating or cooling control (SXC) and management.

Technical focus

- **NEW!** Efficient control of room temperature based on the outdoor temperature, indoor temperature using the Aquarea Manager.
- Optional Smartphone control
- Range from 9 to 12 kW, Single and Three Phase
- Maximum hydraulic module output temperature: 55 °C
- Works down to -20 °C¹
- Cooling temperature range 5-20 °C¹ (SXC)
- Constant capacity at outdoor temperatures down to -15 °C (at a heating water temperature of 35 °C)
- Maximum 30 m (SXF) 20 m (SXC) rise between the outdoor unit and the hydraulic module

* A class pump for Three Phase models.
 1. May need the backup heater to maintain the capacity from -15 degrees.

	Single Phase (Power to indoor)		Three Phase (Power to indoor)	
	KIT-WXF09DE5	KIT-WXF12DE5	KIT-WXF09DE8	KIT-WXF12DE8
Kit Heating Only				
Kit Heating and Cooling	KIT-WXC09DE5	KIT-WXC12DE5	KIT-WXC09DE8	KIT-WXC12DE8
Indoor unit Heating Only	WH-SXF09D3E5	WH-SXF12D6E5	WH-SXF09D3E8	WH-SXF12D9E8
Indoor unit Heating and Cooling	WH-SXC09D3E5	WH-SXC12D6E5	WH-SXC09D3E8	WH-SXC12D9E8
Outdoor unit	WH-UX09DE5	WH-UX12DE5	WH-UX09DE8	WH-UX12DE8
Heating Capacity at +7 °C with heating water at 35 °C	kW 9.00	12.00	9.00	12.00
COP at +7 °C with heating water at 35 °C	4.74	4.67	4.74	4.67
Heating Capacity at +2 °C with heating water at 35 °C	kW 9.00	12.00	9.00	12.00
COP at +2 °C with heating water at 35 °C	3.53	3.40	3.53	3.40
Heating Capacity at -7 °C with heating water at 35 °C	kW 9.00	12.00	9.00	12.00
COP at -7 °C with heating water at 35 °C	2.81	2.70	2.81	2.70
Heating Capacity at -15 °C with heating water at 35 °C	kW 9.00	12.00	9.00	10.00
COP at -15 °C with heating water at 35 °C	2.54	2.40	2.54	2.40
Cooling capacity at 35 °C with cooling water at 7 °C ¹	kW 7.00	10.00	7.00	10.00
EER at 35 °C with cooling water at 7 °C ¹	3.11	2.78	3.11	2.78
Indoor unit				
Dimensions	H x W x D	mm 892 x 502 x 353	892 x 502 x 353	892 x 502 x 353
Weight		kg 47 (48 ¹)	49 (51 ¹)	50 (52 ¹)
Water pipe connector		R 1 1/4	R 1 1/4	R 1 1/4
Pump	No. of Speed	3	3	7
	Input power (Max.)	W 190	190	39
Heating water flow (ΔT=5 K, 35 °C)		l/min 25.8	34.4	25.8
Capacity of integrated electric heater		kW 3	6	3
Input Power		kW 1.90	2.57	1.90
Starting Current		A 8.8 (10.4 ¹)	11.9 (16.7 ¹)	2.9 (3.4 ¹)
Current 1 / Current 2 / Current 3		A 25.0 / 26.0 / -	29.0 / 26.0 / 13.0	14.7 / 13.0 / -
Recommended Fuse		A		
Recommended power cable section		mm ²		
Outdoor unit				
Sound pressure level		dB(A) 49	50	49
Sound power level		dB 66	67	66
Dimensions / Weight	H x W x D	mm / kg 1340 x 900 x 320 / 107	1340 x 900 x 320 / 107	1340 x 900 x 320 / 110
Pipe diameter	Liquid / Gas	mm (Inch) 9.52 (3/8) / 15.88 (5/8)	9.52 (3/8) / 15.88 (5/8)	9.52 (3/8) / 15.88 (5/8)
Refrigerant (R410A)		kg 3.10	3.10	3.10
Pipe length range		m 3 - 30	3 - 30	3 - 30
Pipe length for nominal capacity		m 7	7	7
Pipe length for additional gas		m 15	15	15
Additional gas amount (R410A)		g/m 50	50	50
T/D&O/D Hight Difference		m 20	20	20
Operation range	Outdoor ambient	°C -20 to 35	-20 to 35	-20 to 35
Water outlet at -2/-7/-15	Heating / Cooling ¹	°C 25 - 55 / 5 - 20	25 - 55 / 5 - 20	25 - 55 / 5 - 20

COP classification is at 230 V only in accordance with EU directive 2003/32/EC. Sound pressure measured at 1 m from the outdoor unit and at 1.5 m height. Performance in agreement with EN14511. 1. Specifications for Heating and Cooling models.

Internet Control Ready

INTERNET CONTROL

100% capacity at -20 °C

AQUAREA T-CAP

High efficiency heating

INVERTER+

Environmentally friendly refrigerant

R410A

Down to -20 °C in heating mode

OUTDOOR TEMPERATURE

Boiler connection

RETROFIT

Solar panels connection

SOLAR KIT

Domestic hot water

DHW

Easy control by BMS

CONNECTIVITY

5 year
compressor
warranty

INTERNET CONTROL READY: Optional.

AQUAREA HT
BI-BLOC SINGLE PHASE /
THREE PHASE
HEATING ONLY - SHF



SEASONAL EFFICIENCY
 PRODUCT READY FOR THE NEW ErP ECODESIGN REQUIREMENTS LOT 1

For a house with high temperature radiators (for example, cast iron radiators), the Aquarea High Temperature Solution is most suited as it provides output water temperatures of 65 °C even at -20 °C.

Aquarea HT is able to deliver 65 °C with the Heat Pump alone.

- Works down to -20 °C
- Maximum 30 m rise between the outdoor unit and the hydraulic module



WH-UH09DE5 WH-UH09DE8
 WH-UH12DE5 WH-UH12DE8

Technical focus

- **NEW!** Efficient control of room temperature based on the outdoor temperature, indoor temperature using the Aquarea Manager.
- Optional Smartphone control
- Range from 9 to 12 kW, Single and Three Phase
- Maximum hydraulic module output temperature: 65 °C

Aquarea Manager for all Aquarea.



PAW-A2W-RTWIRED: Wired LCD room thermostat with weekly timer.



PAW-A2W-RTWIRELESS: Wireless LCD room thermostat with weekly timer.

Kit	Single Phase (Power to indoor)		Three Phase (Power to indoor)	
	KIT-WHF09DE5	KIT-WHF12DE5	KIT-WHF09DE8	KIT-WHF12DE8
Indoor unit	WH-SHF09D3E5*	WH-SHF12D6E5*	WH-SHF09D3E8*	WH-SHF12D9E8*
Outdoor unit	WH-UH09DE5	WH-UH12DE5	WH-UH09DE8	WH-UH12DE8
Heating Capacity at +7 °C with heating water at 35 °C	9.17	11.58	9.00	12.00
COP at +7 °C with heating water at 35 °C	4.79	4.29	4.55	4.40
Heating Capacity at +2 °C with heating water at 35 °C	8.90	11.48	9.00	12.00
COP at +2 °C with heating water at 35 °C	3.53	3.27	3.40	3.23
Heating Capacity at -7 °C with heating water at 35 °C	9.78	11.91	9.00	12.00
COP at -7 °C with heating water at 35 °C	2.65	2.61	2.70	2.50
Heating Capacity at -15 °C with heating water at 35 °C	9.02	11.20	9.00	12.00
COP at -15 °C with heating water at 35 °C	2.41	2.18	2.40	2.15
Heating Capacity at +7 °C with heating water at 65 °C	9.00	12.00	9.00	12.00
COP at +7 °C with heating water at 65 °C	2.25	2.20	2.25	2.20
Heating Capacity at +2 °C with heating water at 65 °C	9.00	10.30	9.00	10.30
COP at +2 °C with heating water at 65 °C	1.88	1.83	1.88	1.83
Heating Capacity at -7 °C with heating water at 65 °C	8.90	9.60	8.90	9.60
COP at -7 °C with heating water at 65 °C	1.62	1.61	1.64	1.61
Heating Capacity at -15 °C with heating water at 65 °C	7.80	8.00	7.80	8.00
COP at -15 °C with heating water at 65 °C	1.32	1.30	1.32	1.30
Indoor unit				
Dimensions / Weight	H x W x D	mm / kg	892 x 502 x 353 / 50	892 x 502 x 353 / 52
Water pipe connector			R 1 1/4	R 1 1/4
Pump	No. of Speed		3	3
	Input Power (Max.)	W	190	190
Heating water flow (ΔT=5 K, 35 °C)		l/min	25.8	34.4
Capacity of integrated electric heater		kW	3	9
Input Power		kW	1.98	2.73
Running and Starting current		A	9.5	13.0
Current 1 / Current 2 / Current 3		A	28.5 / 26.0 / -	29.0 / 26.0 / 13.0
Recommended Fuse		A		
Recommended power cable section		mm²		
Outdoor unit				
Sound pressure level / Sound power level	dB(A) / dB		49 / 53	50 / 53
Dimensions / Weight	H x W x D	mm / kg	1340 x 900 x 320 / 105	1340 x 900 x 320 / 105
Pipe diameter	Liquid / Gas	mm (Inch)	9.52 (3/8) / 15.88 (5/8)	9.52 (3/8) / 15.88 (5/8)
Refrigerant (R407C)		kg	2.99	2.99
Pipe length range		m	3 - 30	3 - 30
Pipe length for nominal capacity		m	7	7
Pipe length for additional gas		m	15	15
Additional gas amount (R407C)		g/m	70	70
I/D&O/D Height Difference		m	20	20
Operation range	Outdoor ambient	°C	-20 to 35	-20 to 35
Water outlet at -2/-7/-15		°C	25 - 65	25 - 65

Internet Control Ready

INTERNET CONTROL

Output water 65 °C

HIGH TEMP HEAT PUMP

High efficiency heating

INVERTER+

Environmentally friendly refrigerant

R407C

Down to -20 °C in heating mode

OUTDOOR TEMPERATURE

Boiler connection

RETROFIT

Solar panels connection

SOLAR KIT

Domestic hot water

DHW

Easy control by BMS

CONNECTIVITY

5 year compressor warranty

COP classification is at 230 V only in accordance with EU directive 2003/32/EC. Sound pressure measured at 1 m from the outdoor unit and at 1.5 m height. Performance in agreement with EN14511.
 * Tentative specifications.

AQUAREA
HIGH PERFORMANCE
 MONO-BLOC SINGLE PHASE
 HEATING ONLY - MDF
 HEATING AND COOLING - MDC
 6 AND 9 kW



Panasonic has designed the new Aquarea Mono-Bloc heat pump for houses which have high performance requirements but limited space to install the outdoor unit.

Whatever the weather, Aquarea will always give you maximum efficiency, even at -20 °C. The Mono-Bloc is easy to install in new and existing residential properties.

Technical focus

- **NEW!** Efficient control of room temperature based on the outdoor temperature, indoor temperature using the Aquarea Manager.
- Optional Smartphone control
- Range from 6 and 9 kW, single Phase
- Maximum hydraulic module output temperature: 55 °C
- Works down to -20 °C
- Plug and play system

		Single Phase			
		WH-MDF06E3E5 ¹	WH-MDF09E3E5 ¹	WH-MDC06E3E5 ^{1 2}	WH-MDC09E3E5 ^{1 2}
Heating Capacity at +7 °C with heating water at 35 °C	kW	6.00	9.00	6.00	9.00
COP at +7 °C with heating water at 35 °C		4.48	4.15	4.48	4.15
Heating Capacity at +2 °C with heating water at 35 °C	kW	5.00	7.45	5.00	7.45
COP at +2 °C with heating water at 35 °C		3.45	3.14	3.45	3.14
Heating Capacity at -7 °C with heating water at 35 °C	kW	5.15	7.70	5.15	7.70
COP at -7 °C with heating water at 35 °C		2.68	2.12	2.68	2.12
Heating Capacity at -15 °C with heating water at 35 °C	kW	5.90	7.60	5.90	7.60
COP at -15 °C with heating water at 35 °C		2.21	2.01	2.21	2.01
Cooling capacity at 35 °C with cooling water at 7 °C	kW	-	-	5.50	7.00
EER at 35 °C with cooling water at 7 °C		-	-	2.74	2.44
Sound pressure level	dB(A)	47	49	47	49
Sound power level	dB	65	67	65	67
Dimensions	H x W x D	mm 865 x 1283 x 320	865 x 1283 x 320	865 x 1283 x 320	865 x 1283 x 320
Weight		kg 112	112	112	112
Water pipe connector		R 1 1/4	R 1 1/4	R 1 1/4	R 1 1/4
Pump	No. of Speed	7	7	7	7
	Input Power	W 56	66	56	66
Water Flow (ΔT=5 K, 35 °C)	l/min	17.2	25.8	17.2	25.8
Capacity of integrated electric heater	kW	3.00	3.00	3.00	3.00
Input Power at +7 °C	kW	1.34	2.17	1.34	2.17
Running and Starting current at +7 °C	A	6.1	9.9	6.1	9.9
Current 1	A				
Current 2	A				
Current 3	A				
Recommended Fuse	A				
Recommended power cable section	mm ²				
Operation range	Outdoor ambient	°C -20 to 35	-20 to 35	-20 to 35	-20 to 35
Water outlet at -2/-7/-15	°C	20 - 55	20 - 55	20 - 55	20 - 55

COP classification is at 230 V only in accordance with EU directive 2003/32/EC.

Sound pressure measured at 1 m from the outdoor unit and at 1.5 m height.

Performance in agreement with EN14511.

1. Available from February 2013.

2. Preliminary specifications.

Internet Control Ready

INTERNET CONTROL READY, Optional.

4.48 COP high efficiency

AQUAREA HIGH PERFORMANCE

High efficiency heating

INVERTER+

Environmentally friendly refrigerant

R410A

Down to -20 °C in heating mode

OUTDOOR TEMPERATURE

Easy control by BMS

CONNECTIVITY

5 year compressor warranty

AQUAREA
HIGH PERFORMANCE
 MONO-BLOC SINGLE PHASE /
 THREE PHASE
 HEATING ONLY - MDF
 HEATING AND COOLING - MDC



SEASONAL EFFICIENCY
 PRODUCT READY FOR THE NEW EP ECODESIGN REQUIREMENTS LOT 1

The Aquarea MDF / MDC range adapts well in an existing install with a boiler backup, and in a new application with underfloor heating, low temperature radiators or even fan-coil heaters. This range can also be connected to a solar kit in order to increase efficiency and minimize the impact on the ecosystem. Finally, it is possible to connect a thermostat for even better heating (MDF) or better heating and cooling control (MDC) control and management.

- Range from 9 to 16 kW, Single and Three Phase
- Maximum hydraulic module output temperature: 55 °C
- Works down to -20 °C
- Cooling temperature range 5–20 °C (MDC)

Technical focus

- **NEW!** Efficient control of room temperature based on the outdoor temperature, indoor temperature using the Aquarea Manager.
- Optional Smartphone control

Aquarea Manager for all Aquarea.



PAW-A2W-RTWIRED: Wired LCD room thermostat with weekly timer.



PAW-A2W-RTWIRELESS: Wireless LCD room thermostat with weekly timer.

		Single Phase			Three Phase				
		WH-MDF12C6E5	WH-MDF14C6E5	WH-MDF16C6E5	WH-MDF09C3E8	WH-MDF12C9E8	WH-MDF14C9E8	WH-MDF16C9E8	
		WH-MDC12C6E5	WH-MDC14C6E5	WH-MDC16C6E5	WH-MDC09C3E8	WH-MDC12C9E8	WH-MDC14C9E8	WH-MDC16C9E8	
Outdoor unit Heating Only									
Outdoor unit Heating and Cooling									
Heating Capacity at +7 °C with heating water at 35 °C		kW	12.00	14.00	16.00	9.00	12.00	14.00	16.00
COP at +7 °C with heating water at 35 °C			4.67	4.50	4.23	4.74	4.67	4.50	4.23
Heating Capacity at +2 °C with heating water at 35 °C		kW	11.40	12.40	13.00	9.00	11.40	12.40	13.00
COP at +2 °C with heating water at 35 °C			3.41	3.32	3.25	3.53	3.41	3.32	3.55
Heating Capacity at -7 °C with heating water at 35 °C		kW	10.00	10.70	11.40	9.00	10.00	10.70	11.40
COP at -7 °C with heating water at 35 °C			2.70	2.68	2.65	2.81	2.70	2.68	2.65
Heating Capacity at -15 °C with heating water at 35 °C		kW	8.90	9.50	10.30	8.30	8.90	9.50	10.30
COP at -15 °C with heating water at 35 °C			2.43	2.35	2.33	2.55	2.43	2.35	2.33
Cooling capacity at 35 °C with cooling water at 7 °C ¹		kW	10.00	11.50	12.20	7.00	10.00	11.50	12.20
EER at 35 °C with cooling water at 7 °C ¹			2.78	2.61	2.51	3.11	2.78	2.61	2.54
Sound pressure level		dB(A)	50	51	53	49	50	51	53
Sound power level		dB	63	63	64	60	62	64	65
Dimensions		H x W x D	mm	1410 x 1283 x 320	1410 x 1283 x 320	1410 x 1283 x 320	1410 x 1283 x 320	1410 x 1283 x 320	1410 x 1283 x 320
Weight		kg	153	153	153	157	157	157	
Water pipe connector			R 1 1/4	R 1 1/4	R 1 1/4	R 1 1/4	R 1 1/4	R 1 1/4	
Pump		No. of Speed	3	3	3	3	3	3	
		Input power (Max.)	W	190	190	190	190	190	
Heating water flow (ΔT=5 K, 35 °C)		l/min	34.4	40.1	45.9	25.8	34.4	40.1	45.9
Capacity of integrated electric heater		kW	6	6	6	3	9	9	
Input Power		Heating	kW	2.57	3.11	3.78	1.90	2.57	3.11
		Cooling ¹	kW	3.60	4.40	4.80	2.25	3.60	4.40
Running and Starting current		Heating	A	11.6	14.1	17.1	2.9	3.9	4.7
		Cooling ¹	A	16.1	19.7	21.5	3.4	5.3	6.6
Current 1		A	24.0	25.0	26.0	11.8	8.8	9.4	9.9
Current 2		A	26.0	26.0	26.0	13.0	13.0	13.0	
Current 3		A	13.0	13.0	13.0		13.0	13.0	
Recommended Fuse		A							
Recommended power cable section		mm ²							
Operation range		Outdoor ambient	°C	-20 to 35	-20 to 35	-20 to 35	-20 to 35	-20 to 35	-20 to 35
		Heating / Cooling ¹	°C	25 - 55 / 5 - 20	25 - 55 / 5 - 20	25 - 55 / 5 - 20	25 - 55 / 5 - 20	25 - 55 / 5 - 20	25 - 55 / 5 - 20

COP classification is at 230 V only in accordance with EU directive 2003/32/EC. Sound pressure measured at 1 m from the outdoor unit and at 1.5 m height. Performance in agreement with EN14511.
 1. Specifications for Heating an Cooling models.

Internet Control Ready

4.74 COP high efficiency

High efficiency heating

Environmentally friendly refrigerant

Down to -20 °C in heating mode

Boiler connection

Solar panels connection

Domestic hot water

Easy control by BMS

5 year compressor warranty

INTERNET CONTROL READY: Optional.

AQUAREA T-CAP
MONO-BLOC SINGLE PHASE /
THREE PHASE
HEATING ONLY - MXF
HEATING AND COOLING - MXC



SEASONAL EFFICIENCY
 PRODUCT READY FOR THE NEW ErP ECODESIGN REQUIREMENTS LOT 1

The new MXF / MXC is ideal for residential properties which don't have an external boiler and require a maintained capacity level.

T-CAP stands for Total Capacity. This new line-up is able to maintain the same nominal capacity even at -20 °C* without the help of an electrical booster heater. T-CAP is also able to provide extremely high efficiency, whatever the outside temperature or the water temperature. The MXF adapts well in an existing install with a boiler backup, and in a new application with underfloor heating, low temperature radiators or even fan-coil heaters. This range can also be connected to a solar kit in order to increase efficiency and minimize the impact on the ecosystem. Finally, it is possible to connect a thermostat for even better heating control (MXF) or better heating or cooling control (MXC) and management.

Technical focus

- **NEW!** Efficient control of room temperature based on the outdoor temperature, indoor temperature using the Aquarea Manager.
- Optional Smartphone control
- Range from 9 to 12 kW, Single and Three Phase
- Maximum hydraulic module output temperature: 55 °C
- Works down to -20 °C*
- Cooling temperature range 5-20 °C* (MXC)

* May need the backup heater to maintain the capacity from -15 degrees.

		Single Phase		Three Phase	
		WH-MXF09D3E5	WH-MXF12D6E5	WH-MXF09D3E8	WH-MXF12D9E8
		WH-MXC09D3E5	WH-MXC12D6E5	WH-MXC09D3E8	WH-MXC12D9E8
Outdoor unit Heating Only					
Outdoor unit Heating and Cooling					
Heating Capacity at +7 °C with heating water at 35 °C	kW	9.33	12.08	9.00	12.00
COP at +7 °C with heating water at 35 °C		4.89	4.73	4.74	4.67
Heating Capacity at +2 °C with heating water at 35 °C	kW	9.22	11.76	9.00	12.00
COP at +2 °C with heating water at 35 °C		3.66	3.32	3.53	3.40
Heating Capacity at -7 °C with heating water at 35 °C	kW	9.03	11.63	9.00	12.00
COP at -7 °C with heating water at 35 °C		2.91	2.60	2.81	2.70
Heating Capacity at -15 °C with heating water at 35 °C	kW	9.23	12.06	9.00	12.00
COP at -15 °C with heating water at 35 °C		2.50	2.32	2.54	2.40
Cooling capacity at 35 °C with cooling water at 7 °C ¹	kW	7.00	10.00	7.00	10.00
EER at 35 °C with cooling water at 7 °C ¹		3.11	2.78	3.11	2.78
Sound pressure level	dB(A)	49	50	49	50
Sound power level	dB	60	60	66.1	67.1
Dimensions	H x W x D	mm	1410 x 1283 x 320	1410 x 1283 x 320	1410 x 1283 x 320
Weight		kg	155	158	158
Water pipe connector			R 1 1/4	R 1 1/4	R 1 1/4
Pump	No. of Speed		3	3	3
	Input power (Max.)	W	190	190	190
Heating water flow (ΔT=5 K, 35 °C)	l/min	25.8	34.4	25.8	34.4
Capacity of integrated electric heater	kW	3	6	3	9
Input Power	kW	1.90	2.57	1.90	2.57
Starting Current	A	8.8 (10.4 ¹)	11.9 (16.7 ¹)	2.9	3.9
Current 1	A	25.0	29.0	14.7	11.9
Current 2	A	26.0	26.0	13.0	13.0
Current 3	A		13.0		13.0
Recommended Fuse	A				
Recommended power cable section	mm ²				
Operation range	Outdoor ambient	°C	-20 to 35	-20 to 35	-20 to 35
Water outlet at -2/-7/-15	Heating / Cooling ¹	°C	25 - 55 / 5 - 20	25 - 55 / 5 - 20	25 - 55 / 5 - 20

COP classification is at 230 V only in accordance with EU directive 2003/32/EC. Sound pressure measured at 1 m from the outdoor unit and at 1.5 m height. Performance in agreement with EN14511.
 1. Specifications for Heating and Cooling models.

Internet Control Ready

INTERNET CONTROL

100% capacity at -20 °C

AQUAREA T-CAP

High efficiency heating

INVERTER+

Environmentally friendly refrigerant

R410A

Down to -20 °C in heating mode

OUTDOOR TEMPERATURE

Boiler connection

RETROFIT

Solar panels connection

SOLAR KIT

Domestic hot water

DHW

Easy control by BMS

CONNECTIVITY

5 year compressor warranty

AQUAREA HT

MONO-BLOC SINGLE PHASE / THREE PHASE

HEATING ONLY - MHF



SEASONAL EFFICIENCY

PRODUCT READY FOR
THE NEW EP ECODESIGN
REQUIREMENTS LOT 1

For a house with high temperature radiators (for example, cast iron radiators), the Aquarea High Temperature Solution is most suited as it provides output water temperatures of 65 °C even at -20 °C.

Aquarea HT is able to deliver 65 °C with the Heat Pump alone.

- Optional Smartphone control
- Range from 9 to 12 kW, Single and Three Phase
- Maximum hydraulic module output temperature: 65 °C
- Works down to -20 °C

Technical focus

- **NEW!** Efficient control of room temperature based on the outdoor temperature, indoor temperature using the Aquarea Manager.

Aquarea Manager for all Aquarea.



PAW-A2W-RTWIRED: Wired LCD room thermostat with weekly timer.



PAW-A2W-RTWIRELESS: Wireless LCD room thermostat with weekly timer.

Outdoor unit	Single Phase		Three Phase		
	WH-MHF09D3E5*	WH-MHF12D6E5*	WH-MHF09D3E8*	WH-MHF12D9E8*	
Heating Capacity at +7 °C with heating water at 35 °C	kW	9.00	12.00	9.00	12.00
COP at +7 °C with heating water at 35 °C		4.55	4.40	4.55	4.40
Heating Capacity at +2 °C with heating water at 35 °C	kW	9.00	12.00	9.00	12.00
COP at +2 °C with heating water at 35 °C		3.40	3.32	3.40	3.32
Heating Capacity at -7 °C with heating water at 35 °C	kW	9.00	12.00	9.00	12.00
COP at -7 °C with heating water at 35 °C		2.70	2.50	2.70	2.50
Heating Capacity at -15 °C with heating water at 35 °C	kW	9.00	12.00	9.00	12.00
COP at -15 °C with heating water at 35 °C		2.40	2.15	2.40	2.15
Heating Capacity at +7 °C with heating water at 65 °C	kW	9.00	12.00	9.00	12.00
COP at +7 °C with heating water at 65 °C		2.25	2.20	2.25	2.20
Heating Capacity at +2 °C with heating water at 65 °C	kW	9.00	10.30	9.00	10.30
COP at +2 °C with heating water at 65 °C		1.88	1.83	1.88	1.83
Heating Capacity at -7 °C with heating water at 65 °C	kW	8.90	9.60	8.90	9.60
COP at -7 °C with heating water at 65 °C		1.62	1.61	1.64	1.61
Heating Capacity at -15 °C with heating water at 65 °C	kW	7.80	8.00	7.80	8.00
COP at -15 °C with heating water at 65 °C		1.32	1.30	1.32	1.30
Sound pressure level	dB(A)	49	50	49	50
Sound power level	dB	66	67	66	67
Dimensions	H x W x D	mm	1410 x 1283 x 320	1410 x 1283 x 320	1410 x 1283 x 320
Weight		kg	155	155	158
Water pipe connector			R 1 1/4	R 1 1/4	R 1 1/4
Pump	No. of Speed		3	3	3
	Input Power (Max.)	W	190	190	190
Heating water flow (ΔT=5 K, 35 °C)		l/min	25.8	34.4	25.8
Capacity of integrated electric heater		kW	3	6	3
Input Power		kW	1.98	2.73	1.98
Running and Starting current		A	9.5	12.8	9.5
Current 1		A	28.5	29.0	32.8
Current 2		A	26.0	26.0	13.0
Current 3		A		13.0	13.0
Recommended Fuse		A			
Recommended power cable section		mm ²			
Operation range	Outdoor ambient	°C	-20 to 35	-20 to 35	-20 to 35
	Water outlet at -2/-7/-15	°C	25 - 65	25 - 65	25 - 65








COP classification is at 230 V only in accordance with EU directive 2003/32/EC. Sound pressure measured at 1 m from the outdoor unit and at 1.5 m height. Performance in agreement with EN14511.

* Tentative specifications.



INTERNET CONTROL READY: Optional.

Accessories

Tanks		Standard Sanitary		High Efficiency		Super High Efficiency		
Model		WH-TD20E3E5	WH-TD30E3E5-1	HR 200 ¹	HR 300 ¹	HRS 200 ¹	HRS 300 ¹	HRS 500 ¹
								
Water volume	L	200	300	200	300	200	300	500
Max. water temperature	°C	75	75	75	75	75	75	75
Dimension	Height / Diameter	mm 1,150 / 580	1,150 / 580	1,340 / 600	1,797 / 600	1,642 / 600	1,435 / 680	1,806 / 760
Weight	kg	49	65	108	140	135	170	254
Electric heater	kW	3	3	3	3	3	3	3
Power supply	V	230	230	230	230	230	230	230
Material inside tank		Inox	Inox	Enamelled	Enamelled	Enamelled	Enamelled	Enamelled
Exchange surface	m ²	1.4	1.8	1.8	2.6	2.3	3.5	6.0
Energy loss at 65 °C (insulated tested under EN12897)	kWh/24h	1.9	2.3	1.8	2.2	2.2	2.2	2.7
3 Way valve included		Yes	Yes	Yes	Yes	Yes	Yes	Yes
20 m temperature sensor cable included		Yes	Yes	Yes	Yes	Yes	Yes	Yes
Heat up time	Valuation	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★
Energy losses	Valuation	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★
Efficiency of the tank	Valuation	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★
Warranty		10 years	10 years	7 years	7 years	7 years	7 years	7 years
Maintenance required		No	No	Yearly	Yearly	Yearly	Yearly	Yearly

Panasonic has developed unique, high efficiency water tanks with a large exchange surface and high levels of insulation to minimise energy losses. For example, the HRS200 tank is suitable for installation in non-heated areas.



1. Panasonic's term of warranty is based on the warranty conditions provided by the tank supplier being met. Please ensure the maintenance programme is carried out as instructed in the tank manufacturer's manual.



CZ-NS1P // CZ-NS3P // CZ-NS2P



CZ-TK1



PAW-TS1 / PAW-TS2



CZ-NE1P

Solar Kit Accessories	
CZ-NS1P	Solar connection PCB (for Bi-split type)
CZ-NS3P	Solar connection PCB (for Mono-Bloc 6 and 9 kW type)
CZ-NS2P	Solar connection PCB (for Mono-Bloc)
Sanitary Tank Accessories	
CZ-TK1	Temperature sensor kit for third party tank (with copper pocket and 6 m length sensor cable)
PAW-TS1	Sensor with 6 meter cable length
PAW-TS2	Sensor with 20 meter cable length

Deice Accessories	
CZ-NE1P	Base pan heater kit
Connectivity Solutions	
PAW-AW-KNX-1i	Interface to connect Aquarea to KNX
PAW-AW-ENO-1i	Interface to connect Aquarea to Enocan
PAW-AW-MBS-1	Interface to connect Aquarea to Modbus
PA-AW-WIFI-1	Interface to connect Aquarea to IntesisHome



PAW-HPM1



PAW-HPM2



PAW-HPM2



PAW-A2W-RTWIRED



PAW-A2W-RTWIRELESS

Aquarea Manager Kits		
Reference for Bi-Bloc and Mono-Bloc	Description	Material inside the kit
PAW-HPM12ZONE-U ¹ PAW-HPM12ZONE-M ²	Heat pump manager for control of 2 temperature zones, cascade system or bivalent system with roomsensor and setpoint adaption	PAW-HPM1 // PAW-HPMINT-U ¹ // PAW-HPMINT-M ² // PAW-HPMB1 // PAW-HPMAH1 // PAW-HPMAH1 // PAW-HPMR4
PAW-HPM12ZONELCD-U ¹ PAW-HPM12ZONELCD-M ²	Heat pump manager for control of 2 temperature zones, cascade system or bivalent system with LCD Wireless Room Thermostat	PAW-HPM1 // PAW-HPMINT-U ¹ // PAW-HPMINT-M ² // PAW-HPMB1 // PAW-HPMAH1 // PAW-HPMAH1 // PAW-A2W-RTWIRELESS

Aquarea Manager Accessories	
PAW-HPM1	Aquarea Manager with LCD
PAW-HPM2	Aquarea Manager without LCD
PAW-HPMINT-U	Interface to connect Aquarea Manager to Heat pump Aquarea Bi-Bloc, with inverter control
PAW-HPMINT-M	Interface to connect Aquarea Manager to Heat pump Aquarea Mono-Bloc, with inverter control
PAW-HPMB1	Buffer tank sensor
PAW-HPMDHW	Buffer tank sensor with well
PAW-HPMSOL1	Buffer tank sensor solar (with higher temperature range)
PAW-HPMUH	Outdoor temperature sensor
PAW-HPMAH1	Water flow sensor for heating circuit
PAW-HPMR4	Room sensor
PAW-HPMED	Touch screen
PAW-HPMLCD	Room thermostat with LCD


Room Thermostats	
PAW-A2W-RTWIRED	Wired LCD room thermostat with weekly timer
PAW-A2W-RTWIRELESS	Wireless LCD room thermostat with weekly timer

Hydraulic Accessories	
PAW-1PMP2ZONE	2 zone kit with Aquarea Manager, manifold, one A-class pumps, 1 mixture valve and check valve+filter
PAW-2PMP2ZONE	2 zone kit with Aquarea Manager, hydraulic switch, manifold, 2 A-class pumps, one mixture valve and check valve+ filter
PAW-FILTER	2 check valves + filter


1 For Bi-Bloc.
2 For Mono-Bloc.

Examples of installations with Aquarea manager


2 Zones Temperature Control with h PAW-HPM12ZONE-U

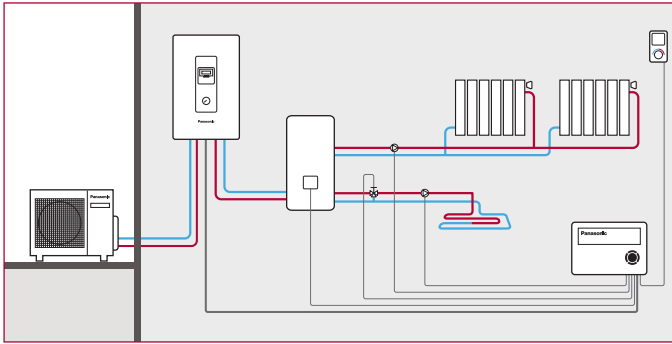


3 Heat Pumps on cascade with PAW-HPM12ZONELCD-U

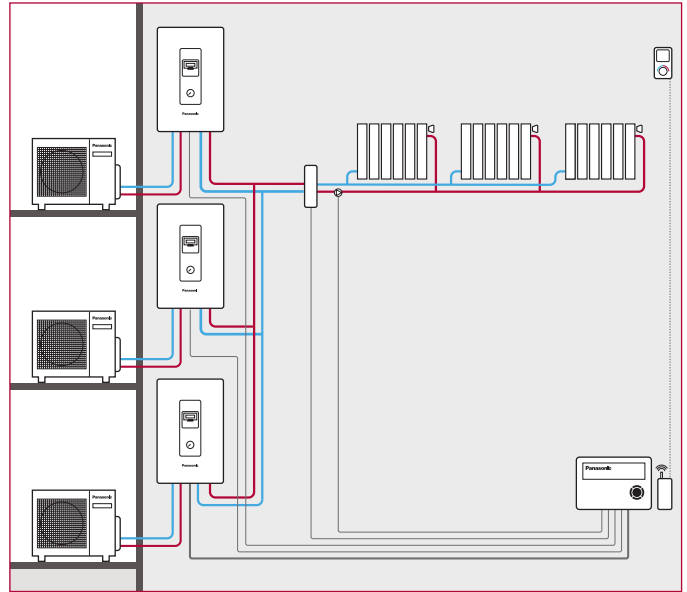


2 Zones Temperature Control + DHW with PAW-HPM12ZONE-U

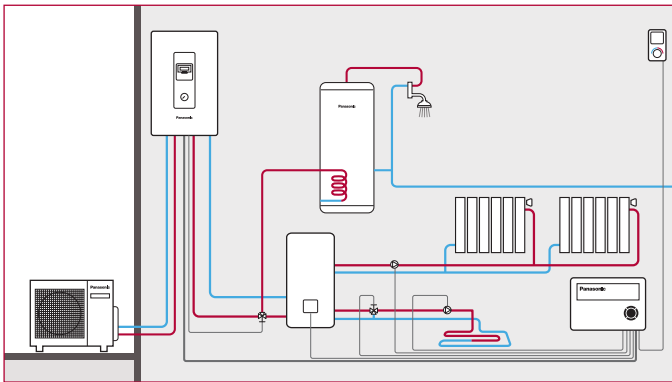


Heat Pump + Boiler Management with DHW with PAW-HPM12ZONELCD-U

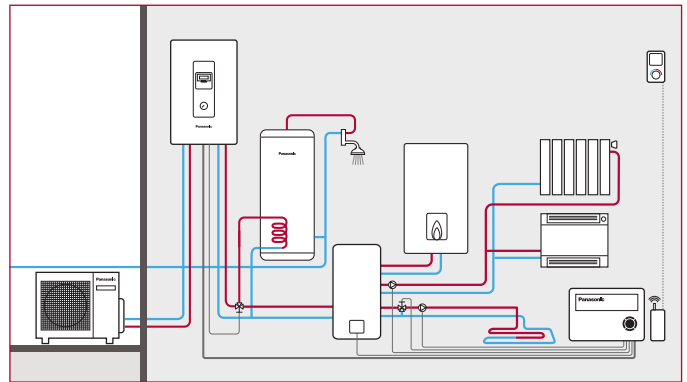

2 Heat Pumps on cascade with PAW-HPM12ZONE-U

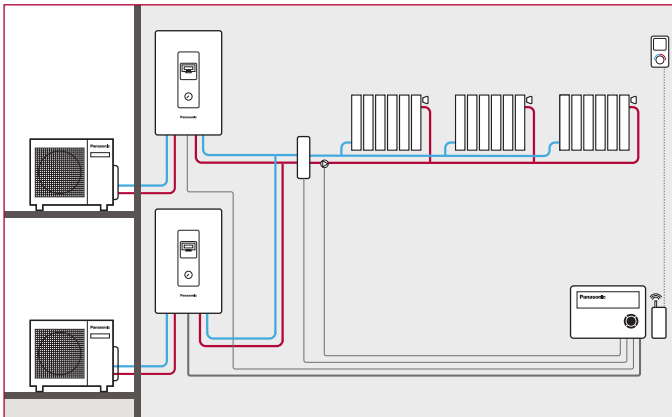

2 Heat Pumps + Boiler with PAW-HPM12ZONE-U

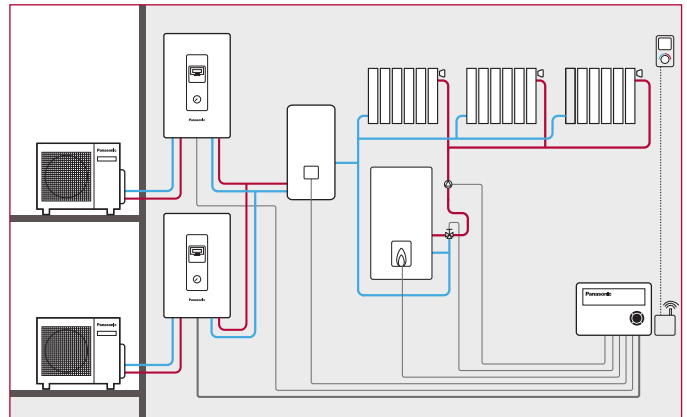

New Aquarea Air

NEW

AQUAREA AIR



PAW-AAIR-900



PAW-AAIR-700

PAW-AAIR-200

New line up of Super low temperature radiators for Heat Pump application:

Aquarea Air 200/700/900 with radiating effect

Major Benefit



- On the water installation
 - Only 1 water temperature on the water circuit (35 °C)
 - No expansive 2 zone kits
 - No overflow valve (as Aquarea Air have a 3 ways valve)
 - Very easy to install
- On the efficiency
 - COP with water at 35 °C is 32% higher than efficiency with water at 45 °C! (case MDF06, at +7 °C)

Main features

- Front panel heating with radiant effect
- High heating capacity (without main fan running)
- 4 fan speeds and capacities
- Exclusive design
- Extremely compact (only 12.7 cm deep)
- Cooling and dehumidification functions possible (drain is needed)
- 3 ways valve included (no over flow valve needed on the installation if more than 3 radiators installed)
- Touch screen thermostat


Fan Coils for Heat Pump application	PAW-AAIR-200					PAW-AAIR-700					PAW-AAIR-900				
	W	kg/h	kPa	m³/h	W	W	kg/h	kPa	m³/h	W	W	kg/h	kPa	m³/h	W
Total heating capacity	570	470	350	160	138	1188	1032	708	360	223	1703	1420	886	475	273
Water flow	98,0	80,8	60,2	27,5	23,7	204,3	177,5	121,8	61,9	38,4	292,9	244,2	152,4	81,7	47,0
Water pressure drop	2,9	2,0	0,4	0,2	0,1	1,0	0,8	0,3	0,1	0,1	2,2	1,6	0,5	0,2	0,1
Air flow	162	113	55	37	28	320	252	155	84	44	461	367	248	110	54
	Speed	Max	Med	Min	Super Min	Main Fan Off	Max	Med	Min	Super Min	Main Fan Off	Max	Med	Min	Super Min
Maximum input power	13	9	7	5	2	22	18	14	9	3	24	20	16	11	3
Sound pressure level	39,4	33,2	24,7	18,8	17,6	40,2	34,1	25,8	19,6	18,4	42,2	34,4	26,2	22,3	18,4
Inlet water temperature	35	35	35	35	35	35	35	35	35	35	35	35	35	35	35
Outlet water temperature	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30
Inlet air temperature	19	19	19	19	19	19	19	19	19	19	19	19	19	19	19
Outlet air temperature	30,0	32,0	38,9	32,6	34,5	30,6	31,8	33,3	32,4	34,9	30,6	31,1	30,2	32,5	34,8
Dimensions (H x W x D)	mm 735x576x129					mm 935x576x129					mm 1135x576x129				
3 ways valve included	Yes					Yes					Yes				
Touch screen thermostat	Yes					Yes					Yes				

During winter, the operating principle is based on micro fans of very low power consumption and minimum noise that send hot air, coming from the heat exchanger, to the inside of the front panel of the device and therefore heat it effectively. With this principle, the terminal also provides significant power while heating, without running the main fan. In this way, comfort temperature is maintained through operations with no special air movements and in absolute silence. In summer mode, the airflow generated by the micro fans is stopped to avoid any dew formation phenomenon on the terminal's front surface.

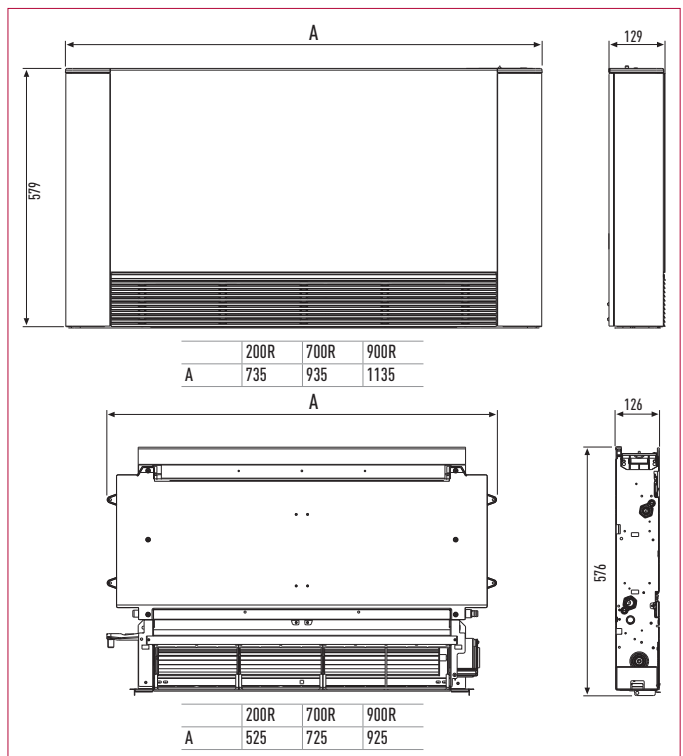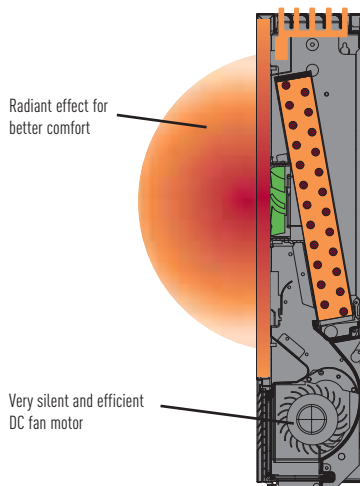

Error Codes


The operation led blinks and an error code appears on the control panel display.



- Turn the unit off and inform the authorised dealer of the error code.
- The timer operation is cancelled when an error code occurs.

Force Heater mode button



- The backup heater also serves as backup in case of malfunctioning of the outdoor unit.
- Press  to stop the force heater operation.
- During Force Heater mode, all other operations are not allowed.

Error Code List

Diagnosis display	Abnormality / Protection control	Abnormality Judgement	Primary location to verify
H00	No abnormality detected	—	—
H12	Indoor/Outdoor capacity unmatched	90s after power supply	<ul style="list-style-type: none"> • Indoor/outdoor connection wire • Indoor/outdoor PCB • Specification and combination table in catalogue
H15	Outdoor compressor temperature sensor abnormality	Continue for 5 sec.	<ul style="list-style-type: none"> • Compressor temperature sensor (defective or disconnected)
H23	Indoor refrigerant liquid temperature sensor abnormality	Continue for 5 sec.	<ul style="list-style-type: none"> • Refrigerant liquid temperature sensor (defective or disconnected)
H38	Indoor/Outdoor mismatch	—	<ul style="list-style-type: none"> • Indoor/Outdoor PCB
H42	Compressor low pressure abnormality	—	<ul style="list-style-type: none"> • Outdoor pipe temperature sensor • Clogged expansion valve or strainer • Insufficient refrigerant • Outdoor PCB • Compressor
H62	Water flow switch abnormality	Continue for 1 min.	<ul style="list-style-type: none"> • Water flow switch
H64	Refrigerant high pressure abnormality	Continue for 5 sec.	<ul style="list-style-type: none"> • Outdoor high pressure sensor (defective or disconnected)
H70	Back-up heater OLP abnormality	Continue for 60 sec.	<ul style="list-style-type: none"> • Back-up heater OLP (Disconnection or activated)
H72	Tank sensor abnormal	Continue for 5 sec.	<ul style="list-style-type: none"> • Tank sensor
H76	Indoor - control panel communication abnormality	—	<ul style="list-style-type: none"> • Indoor - control panel (defective or disconnected)
H90	Indoor / outdoor abnormal communication	> 1 min after starting operation	<ul style="list-style-type: none"> • Internal / external cable connections • Indoor / Outdoor PCB
H91	Tank heater OLP abnormality	Continue for 60 sec.	<ul style="list-style-type: none"> • Tank heater OLP (Disconnection or activated)
H95	Indoor/Outdoor wrong connection	—	<ul style="list-style-type: none"> • Indoor/Outdoor supply voltage
H98	Outdoor high pressure overload protection	—	<ul style="list-style-type: none"> • Outdoor high pressure sensor • Water pump or water leakage • Clogged expansion valve or strainer • Excess refrigerant • Outdoor PCB
H99	Indoor heat exchanger freeze prevention	—	<ul style="list-style-type: none"> • Indoor heat exchanger • Refrigerant shortage
F12	Pressure switch activate	4 times occurrence within 20 minutes	<ul style="list-style-type: none"> • Pressure switch
F14	Outdoor compressor abnormal revolution	4 times occurrence within 20 minutes	<ul style="list-style-type: none"> • Outdoor compressor
F15	Outdoor fan motor lock abnormality	2 times occurrence within 30 minutes	<ul style="list-style-type: none"> • Outdoor PCB • Outdoor fan motor
F16	Total running current protection	3 times occurrence within 20 minutes	<ul style="list-style-type: none"> • Excess refrigerant • Outdoor PCB
F20	Outdoor compressor overheating protection	4 times occurrence within 30 minutes	<ul style="list-style-type: none"> • Compressor tank temperature sensor • Clogged expansion valve or strainer • Insufficient refrigerant • Outdoor PCB • Compressor
F22	IPM (power transistor) overheating protection	3 times occurrence within 30 minutes	<ul style="list-style-type: none"> • Improper heat exchange • IPM (Power transistor)
F23	Outdoor Direct Current (DC) peak detection	7 times occurrence continuously	<ul style="list-style-type: none"> • Outdoor PCB • Compressor
F24	Refrigeration cycle abnormality	2 times occurrence within 20 minutes	<ul style="list-style-type: none"> • Insufficient refrigerant • Outdoor PCB • Compressor low compression
F25	Cooling / Heating cycle changeover abnormality	4 times occurrence within 30 minutes	<ul style="list-style-type: none"> • 4-way valve • V-coil
F27	Pressure switch abnormality	Continue for 1 min.	<ul style="list-style-type: none"> • Pressure switch
F36	Outdoor air temperature sensor abnormality	Continue for 5 sec.	<ul style="list-style-type: none"> • Outdoor air temperature sensor (defective or disconnected)
F37	Indoor water inlet temperature sensor abnormality	Continue for 5 sec.	<ul style="list-style-type: none"> • Water inlet temperature sensor (defective or disconnected)
F40	Outdoor discharge pipe temperature sensor abnormality	Continue for 5 sec.	<ul style="list-style-type: none"> • Outdoor discharge pipe temperature sensor (defective or disconnected)
F41	PFC control	4 times occurrence within 10 minutes	<ul style="list-style-type: none"> • Voltage at PFC
F42	Outdoor heat exchanger temperature sensor abnormality	Continue for 5 sec.	<ul style="list-style-type: none"> • Outdoor heat exchanger temperature sensor (defective or disconnected)
F43	Outdoor defrost sensor abnormality	Continue for 5 sec.	<ul style="list-style-type: none"> • Outdoor defrost sensor (defective or disconnected)
F45	Indoor water outlet temperature sensor abnormality	Continue for 5 sec.	<ul style="list-style-type: none"> • Water outlet temperature sensor (defective or disconnected)
F46	Outdoor Current Transformer open circuit	—	<ul style="list-style-type: none"> • Insufficient refrigerant • Outdoor PCB • Compressor low
F95	Cooling high pressure overload protection	—	<ul style="list-style-type: none"> • Outdoor high pressure sensor • Water pump or water leakage • Clogged expansion valve or strainer • Excess refrigerant • Outdoor PCB
F48	Outdoor EVA outlet temperature sensor abnormality	Continue for 5 sec.	<ul style="list-style-type: none"> • Outdoor EVA outlet temperature sensor (detective or disconnected)
F49	Out bypass outlet temperature sensor abnormality	Continue for 5 sec.	<ul style="list-style-type: none"> • Outdoor bypass outlet temperature sensor (detective or disconnected)

Heating Capacity table based on outlet temperature and outside temperature

Aqueara. High Performance. Bi-Bloc Single Phase. Heating Only - SDF. Heating and Cooling - SDC. 3 and 5 kW

WH-SDF03E3E5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55
-15	3.20	1.39	2.30	3.20	1.39	2.30	3.00	1.64	1.83	3.00	1.64	1.83	2.75	1.92	1.43	2.75	1.92	1.43
-7/-8	3.20	1.19	2.69	3.20	1.19	2.69	3.20	1.48	2.16	3.20	1.48	2.16	3.20	1.86	1.72	3.20	1.86	1.72
2/1	3.20	0.90	3.56	3.20	0.90	3.56	3.20	1.16	2.76	3.20	1.16	2.76	3.20	1.49	2.15	3.20	1.49	2.15
7/6	3.20	0.64	5.00	3.20	0.64	5.00	3.20	0.89	3.60	3.20	0.89	3.60	3.20	1.20	2.67	3.20	1.20	2.67

WH-SDF05E3E5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55
-15	4.20	1.94	2.16	4.20	1.94	2.16	3.4	1.98	1.72	3.40	1.98	1.72	3.00	2.12	1.42	3.00	2.12	1.42
-7/-8	4.20	1.62	2.59	4.20	1.62	2.59	3.8	1.82	2.09	3.80	1.82	2.09	3.55	2.08	1.71	3.55	2.08	1.71
2/1	4.20	1.35	3.11	4.20	1.35	3.11	4.2	1.65	2.55	4.20	1.65	2.55	4.10	2.07	1.98	4.10	2.07	1.98
7/6	5.00	1.08	4.63	5.00	1.08	4.63	5.00	1.48	3.38	5.00	1.48	3.38	5.00	1.89	2.65	5.00	1.89	2.65

Aqueara. High Performance. Mono-Bloc Single Phase. Heating Only - MDF. Heating and Cooling - MDC. 6 and 9 kW


WH-MDF06E3E5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55
-15	6.15	2.50	2.46	5.90	2.66	2.22	5.65	2.82	2.00	5.40	2.98	1.81	5.20	3.15	1.65	5.00	3.32	1.51
-7	5.18	1.68	3.08	5.15	1.92	2.68	5.13	2.17	2.36	5.10	2.41	2.12	5.45	2.81	1.94	5.80	3.20	1.81
2	5.00	1.23	4.06	5.00	1.45	3.45	5.00	1.68	2.98	5.00	1.90	2.63	5.00	2.19	2.29	5.00	2.48	2.02
7	6.00	1.13	5.31	6.00	1.35	4.44	6.00	1.58	3.80	6.00	1.80	3.33	6.00	2.09	2.87	6.00	2.38	2.52
25	7.30	0.78	9.36	7.10	0.93	7.63	6.90	1.09	6.33	6.70	1.24	5.40	6.50	1.41	4.61	6.30	1.58	3.99


WH-MDF09E3E5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55
-15	7.90	3.62	2.18	7.60	3.77	2.02	7.30	3.93	1.86	7.00	4.08	1.72	6.45	4.06	1.59	5.90	4.03	1.46
-7	7.80	3.38	2.31	7.70	3.63	2.12	7.60	3.88	1.96	7.50	4.13	1.82	7.55	4.59	1.65	7.60	5.05	1.50
2	7.00	2.01	3.48	7.00	2.30	3.04	7.00	2.60	2.69	7.00	2.89	2.42	7.00	3.37	2.08	7.00	3.85	1.82
7	9.00	1.87	4.81	9.00	2.17	4.15	9.00	2.48	3.63	9.00	2.78	3.20	8.95	3.31	2.70	8.90	3.84	2.32
25	9.00	0.99	9.09	9.00	1.31	6.87	9.00	1.63	5.52	9.00	1.95	4.62	9.00	2.20	4.09	9.00	2.45	3.67


Constant Pressure Head Difference ($\Delta p-c$) SDC. 3 and 5 kW

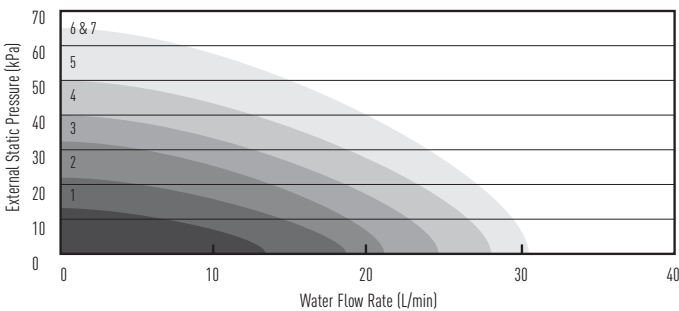


Variable Pressure Head Difference ($\Delta p-v$) SDC. 3 and 5 kW

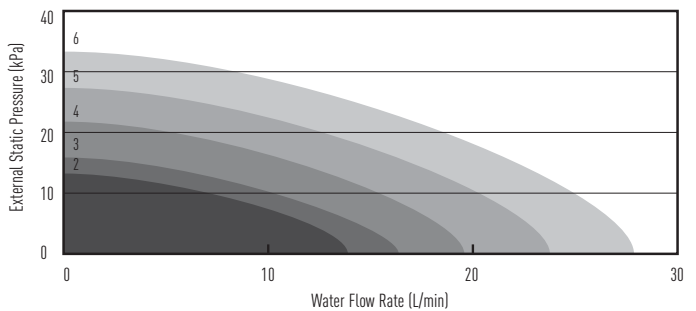

Constant Pressure Head Difference ($\Delta p-c$) SDC. 6 and 9 kW

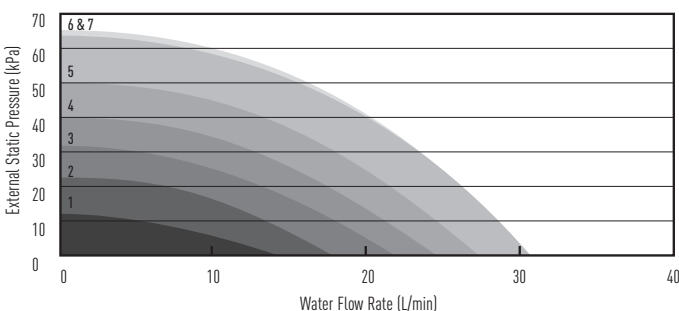

Variable Pressure Head Difference ($\Delta p-v$) SDC. 6 and 9 kW

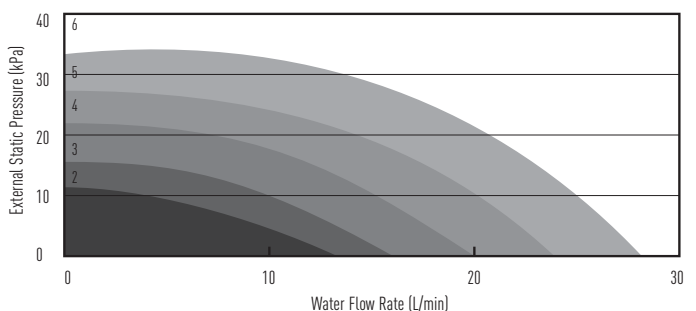

Heating Capacity table based on outlet temperature and outside temperature

Aquarea. High Performance. Bi-Bloc Single Phase / Three Phase. Heating and Cooling - SDC

Models	WH-SDC09			WH-SDC12			WH-SDC14			WH-SDC16		
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
16	5.90	1.01	5.84	7.65	1.30	5.88	8.85	1.50	5.90	9.62	1.63	5.90
25	7.45	1.59	4.69	9.20	2.30	4.00	10.00	2.68	3.73	10.51	2.85	3.69
35	7.00	2.25	3.11	10.00	3.55	2.82	11.50	4.40	2.61	12.20	4.80	2.54
43	5.80	2.59	2.24	7.60	3.95	1.92	9.05	5.01	1.81	10.08	5.47	1.84

Aquarea. High Performance. Mono-Bloc Single Phase / Three Phase. Heating Only - MDF

WH-MDF12C6E5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55
-15	9.30	3.50	2.66	8.90	3.66	2.43	8.50	3.83	2.22	8.10	3.99	2.03	7.50	4.09	1.83	7.00	4.20	1.67
-7	10.40	3.41	3.05	10.00	3.70	2.70	9.60	3.90	2.46	9.20	4.10	2.24	8.70	4.20	2.07	8.20	4.31	1.90
2	11.80	3.14	3.76	11.40	3.34	3.41	11.00	3.57	3.08	10.60	3.78	2.80	9.80	3.98	2.46	9.10	4.18	2.18
7	12.00	2.14	5.61	12.00	2.57	4.67	12.00	3.00	4.00	12.00	3.43	3.50	12.00	3.82	3.14	12.00	4.20	2.86
25	12.00	1.42	8.45	12.00	1.70	7.06	11.80	1.98	5.96	11.70	2.27	5.15	11.50	2.53	4.55	11.40	2.78	4.10

WH-MDF14C6E5


Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55
-15	9.90	3.91	2.53	9.50	4.05	2.35	9.00	4.19	2.15	8.60	4.33	1.99	7.90	4.45	1.78	7.30	4.56	1.60
-7	11.10	3.73	2.98	10.70	4.00	2.68	10.20	4.20	2.43	9.80	4.40	2.23	9.10	4.57	1.99	8.50	4.74	1.79
2	12.90	3.51	3.68	12.40	3.73	3.32	11.90	3.95	3.01	11.40	4.17	2.73	10.40	4.29	2.42	9.50	4.40	2.16
7	14.00	2.60	5.38	14.00	3.11	4.50	14.00	3.63	3.86	14.00	4.14	3.38	13.60	4.61	2.95	13.30	5.08	2.62
25	14.00	1.75	8.00	14.00	2.10	6.67	14.00	2.45	5.71	14.00	2.80	5.00	14.00	3.05	4.59	14.00	3.44	4.07

WH-MDF16C6E5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55
-15	10.60	4.13	2.57	10.30	4.42	2.33	10.00	4.71	2.12	9.70	5.00	1.94	8.80	4.98	1.77	7.90	4.95	1.60
-7	11.90	4.07	2.92	11.40	4.30	2.65	10.80	4.50	2.40	10.30	4.70	2.19	9.60	4.85	1.98	9.00	4.99	1.80
2	13.50	3.78	3.57	13.00	4.00	3.25	12.40	4.22	2.94	11.90	4.44	2.68	10.80	4.50	2.40	9.80	4.55	2.15
7	16.00	3.25	4.92	16.00	3.78	4.23	16.00	4.31	3.71	16.00	4.84	3.31	15.20	5.15	2.95	14.50	5.45	2.66
25	16.00	2.35	6.81	16.00	2.73	5.86	16.00	3.11	5.14	16.00	3.49	4.58	16.00	3.71	4.31	15.90	3.93	4.05

Tamb: Ambient Temperature (°C). LWC: Leaving Water Condenser Temperature (°C). HC: Heating Capacity (kW). IP: Power Input (kW)
 This data is measured by Panasonic in accordance with EN14511-2 standard. This data is for reference purpose only, and does not guarantee the performance.

Hydraulic Pump Performance

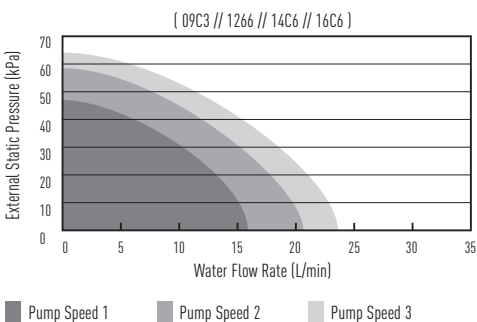

Aquarea. High Performance. Mono-Bloc Single Phase / Three Phase. Heating Only - MDF (Cont.)

WH-MDF09C3E8																			
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55	
-15	8.65	3.10	2.79	8.30	3.25	2.55	7.95	3.45	2.30	7.95	3.45	2.30	7.15	3.75	1.91	7.15	3.75	1.91	
-7	9.35	2.95	3.17	9.00	3.20	2.81	8.85	3.50	2.53	8.85	3.50	2.53	8.30	3.85	2.16	8.30	3.85	2.16	
2	9.31	2.39	3.90	9.00	2.55	3.53	9.00	2.82	3.19	9.00	2.82	3.19	8.90	3.53	2.52	8.90	3.53	2.52	
7	9.00	1.58	5.70	9.00	1.90	4.74	9.00	2.20	4.09	9.00	2.20	4.09	9.00	2.80	3.21	9.00	2.80	3.21	
25	9.00	1.09	8.26	9.00	1.28	7.03	8.73	1.48	5.90	8.73	1.48	5.90	8.28	1.86	4.45	8.28	1.86	4.45	

WH-MDF12C9E8

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55
-15	9.30	3.50	2.66	8.90	3.66	2.43	8.50	3.83	2.22	8.10	3.99	2.03	7.50	4.09	1.83	7.00	4.20	1.67
-7	10.40	3.41	3.05	10.00	3.70	2.70	9.60	3.90	2.46	9.20	4.10	2.24	8.70	4.20	2.07	8.20	4.31	1.90
2	11.80	3.14	3.76	11.40	3.34	3.41	11.00	3.57	3.08	10.60	3.78	2.80	9.80	3.98	2.46	9.10	4.18	2.18
7	12.00	2.14	5.61	12.00	2.57	4.67	12.00	3.00	4.00	12.00	3.43	3.50	12.00	3.82	3.14	12.00	4.20	2.86
25	12.00	1.42	8.45	12.00	1.70	7.06	11.80	1.98	5.96	11.70	2.27	5.15	11.50	2.53	4.55	11.40	2.78	4.10

WH-MDF14C9E8

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55
-15	9.90	3.91	2.53	9.50	4.05	2.35	9.00	4.19	2.15	8.60	4.33	1.99	7.90	4.45	1.78	7.30	4.56	1.60
-7	11.10	3.73	2.98	10.70	4.00	2.68	10.20	4.20	2.43	9.80	4.40	2.23	9.10	4.57	1.99	8.50	4.74	1.79
2	12.90	3.51	3.68	12.40	3.73	3.32	11.90	3.95	3.01	11.40	4.17	2.73	10.40	4.29	2.42	9.50	4.40	2.16
7	14.00	2.60	5.38	14.00	3.11	4.50	14.00	3.63	3.86	14.00	4.14	3.38	13.60	4.61	2.95	13.30	5.08	2.62
25	14.00	1.75	8.00	14.00	2.10	6.67	14.00	2.45	5.71	14.00	2.80	5.00	14.00	3.05	4.59	14.00	3.44	4.07

WH-MDF16C9E8

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55
-15	10.60	4.13	2.57	10.30	4.42	2.33	10.00	4.71	2.12	9.70	5.00	1.94	8.80	4.98	1.77	7.90	4.95	1.60
-7	11.90	4.07	2.92	11.40	4.30	2.65	10.80	4.50	2.40	10.30	4.70	2.19	9.60	4.85	1.98	9.00	4.99	1.80
2	13.50	3.78	3.57	13.00	4.00	3.25	12.40	4.22	2.94	11.90	4.44	2.68	10.80	4.50	2.40	9.80	4.55	2.15
7	16.00	3.25	4.92	16.00	3.78	4.23	16.00	4.31	3.71	16.00	4.84	3.31	15.20	5.15	2.95	14.50	5.45	2.66
25	16.00	2.35	6.81	16.00	2.73	5.86	16.00	3.11	5.14	16.00	3.49	4.58	16.00	3.71	4.31	15.90	3.93	4.05

Aquarea. High Performance. Mono-Bloc Single Phase / Three Phase. Heating and Cooling - MDC

Models	WH-MDC09			WH-MDC12			WH-MDC14			WH-MDC16		
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
16	5.90	1.01	5.84	7.65	1.30	5.88	8.85	1.50	5.90	9.62	1.63	5.90
25	7.45	1.59	4.69	9.20	2.30	4.00	10.00	2.68	3.73	10.51	2.85	3.69
35	7.00	2.25	3.11	10.00	3.60	2.78	11.50	4.40	2.61	12.20	4.80	2.54
43	5.80	2.59	2.24	7.60	3.95	1.92	9.05	5.01	1.81	10.08	5.47	1.84

Tamb: Ambient Temperature (°C). LWC: Leaving Water Condenser Temperature (°C). HC: Heating Capacity (kW). IP: Power Input (kW)

This data is measured by Panasonic in accordance with EN14511-2 standard. This data is for reference purpose only, and does not guarantee the performance.

Heating Capacity table based on outlet temperature and outside temperature

Aquarea T-CAP. Mono-Bloc Single Phase / Three Phase. Heating Only - MXF

WH-MXF09D3E5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55
-15	9.00	3.28	2.74	9.00	3.55	2.54	9.00	3.95	2.28	9.00	4.34	2.07	9.00	4.77	1.89	9.00	5.20	1.73
-7	9.00	2.75	3.27	9.00	3.20	2.81	9.00	3.66	2.46	9.00	4.11	2.19	9.00	4.31	2.09	9.00	4.50	2.00
2	9.00	2.40	3.75	9.00	2.55	3.53	9.00	2.82	3.19	9.00	3.09	2.91	9.00	3.60	2.50	9.00	4.11	2.19
7	9.00	1.68	5.36	9.00	1.90	4.74	9.00	2.20	4.09	9.00	2.50	3.60	9.00	2.88	3.13	9.00	3.10	2.90
25	13.60	1.54	8.83	13.60	1.75	7.77	13.20	1.97	6.70	12.80	2.18	5.87	12.00	2.45	4.90	11.20	2.71	4.13

WH-MXF12D6E5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55
-15	12.00	4.79	2.51	12.00	5.00	2.40	11.50	5.21	2.21	11.00	5.42	2.03	10.70	5.86	1.83	10.50	6.30	1.67
-7	12.00	3.89	3.08	12.00	4.45	2.70	12.00	5.02	2.39	12.00	5.58	2.15	12.00	5.94	2.02	12.00	6.30	1.90
2	12.00	3.23	3.72	12.00	3.53	3.40	12.00	3.91	3.07	12.00	4.29	2.80	12.00	4.90	2.45	12.00	5.51	2.18
7	12.00	2.22	5.41	12.00	2.57	4.67	12.00	3.00	4.00	12.00	3.43	3.50	12.00	3.82	3.14	12.00	4.20	2.86
25	13.60	1.59	8.55	13.60	1.80	7.56	13.40	2.14	6.26	13.20	2.47	5.34	12.60	2.70	4.67	12.00	2.93	4.10

WH-MXF09D3E8

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55
-15	9.00	3.28	2.74	9.00	3.55	2.54	9.00	3.95	2.28	9.00	4.34	2.07	9.00	4.77	1.89	9.00	5.20	1.73
-7	9.00	2.75	3.27	9.00	3.20	2.81	9.00	3.66	2.46	9.00	4.11	2.19	9.00	4.31	2.09	9.00	4.50	2.00
2	9.00	2.40	3.75	9.00	2.55	3.53	9.00	2.82	3.19	9.00	3.09	2.91	9.00	3.60	2.50	9.00	4.11	2.19
7	9.00	1.68	5.36	9.00	1.90	4.74	9.00	2.20	4.09	9.00	2.50	3.60	9.00	2.88	3.13	9.00	3.10	2.90
25	13.60	1.54	8.83	13.60	1.75	7.77	13.20	1.97	6.70	12.80	2.18	5.87	12.00	2.45	4.90	11.20	2.71	4.13

WH-MXF12D9E8


Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55
-15	12.00	4.79	2.51	12.00	5.00	2.40	12.00	5.45	2.20	12.00	5.90	2.03	11.50	6.28	1.83	11.10	6.66	1.67
-7	12.00	3.89	3.08	12.00	4.45	2.70	12.00	5.02	2.39	12.00	5.58	2.15	12.00	5.94	2.02	12.00	6.30	1.90
2	12.00	3.23	3.72	12.00	3.53	3.40	12.00	3.91	3.07	12.00	4.29	2.80	12.00	4.90	2.45	12.00	5.51	2.18
7	12.00	2.22	5.41	12.00	2.57	4.67	12.00	3.00	4.00	12.00	3.43	3.50	12.00	3.82	3.14	12.00	4.20	2.86
25	13.60	1.59	8.55	13.60	1.80	7.56	13.40	2.14	6.26	13.20	2.47	5.34	12.60	2.70	4.67	12.00	2.93	4.10

Aquarea T-CAP. Mono-Bloc Single Phase / Three Phase. Heating and Cooling - MXC

MODELS	WH-MXC09			WH-MXC12		
	HC	IP	COP	HC	IP	COP
16	7.00	1.40	5.00	7.50	1.45	5.17
25	7.65	1.95	3.92	8.90	2.20	4.05
35	7.00	2.25	3.11	10.00	3.60	2.78
43	6.25	2.70	2.31	8.00	3.05	2.62

Tamb: Ambient Temperature (°C). LWC: Leaving Water Condenser Temperature (°C). HC: Heating Capacity (kW). IP: Power Input (kW)
 This data is measured by Panasonic in accordance with EN14511-2 standard. This data is for reference purpose only, and does not guarantee the performance.

Hydraulic Pump Performance

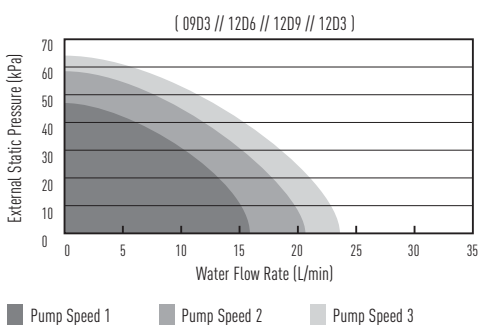

Aquarea T-CAP, Bi-Bloc Single Phase / Three Phase. Heating and Cooling - SXC

Models	WH-SXC09			WH-SXC12		
	HC	IP	COP	HC	IP	COP
Tamb						
16	7.00	1.40	5.00	7.50	1.45	5.17
25	7.65	1.95	3.92	8.90	2.20	4.05
35	7.00	2.25	3.11	10.00	3.60	2.78
43	6.25	2.70	2.31	8.00	3.05	2.62

Aquarea T-CAP, Bi-Bloc Single Phase / Three Phase. Heating Only - SXF

WH-SXF09D3E5																						
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55	55	55	55	55
-15	9.00	3.28	2.74	9.00	3.55	2.54	9.00	3.95	2.28	9.00	4.34	2.07	9.00	4.77	1.89	9.00	5.20	1.73	9.00	5.20	1.73	9.00
-7	9.00	2.75	3.27	9.00	3.20	2.81	9.00	3.66	2.46	9.00	4.11	2.19	9.00	4.31	2.09	9.00	4.50	2.00	9.00	4.50	2.00	9.00
2	9.00	2.40	3.75	9.00	2.55	3.53	9.00	2.82	3.19	9.00	3.09	2.91	9.00	3.60	2.50	9.00	4.11	2.19	9.00	4.11	2.19	9.00
7	9.00	1.68	5.36	9.00	1.90	4.74	9.00	2.20	4.09	9.00	2.50	3.60	9.00	2.80	3.21	9.00	3.10	2.90	9.00	3.10	2.90	9.00
25	13.60	1.54	8.83	13.60	1.75	7.77	13.20	1.97	6.70	12.80	2.18	5.87	12.00	2.45	4.90	11.20	2.71	4.13	12.00	2.71	4.13	12.00


WH-SXF12D6E5																						
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55	55	55	55	
-15	12.00	4.79	2.51	12.00	5.00	2.40	11.50	5.21	2.21	11.00	5.42	2.03	10.70	5.86	1.83	10.50	6.30	1.67	12.00	6.30	1.67	12.00
-7	12.00	3.89	3.08	12.00	4.45	2.70	12.00	5.02	2.39	12.00	5.58	2.15	12.00	5.94	2.02	12.00	6.30	1.90	12.00	6.30	1.90	12.00
2	12.00	3.23	3.72	12.00	3.53	3.40	12.00	3.91	3.07	12.00	4.29	2.80	12.00	4.90	2.45	12.00	5.51	2.18	12.00	5.51	2.18	12.00
7	12.00	2.22	5.41	12.00	2.57	4.67	12.00	3.00	4.00	12.00	3.43	3.50	12.00	3.82	3.14	12.00	4.20	2.86	12.00	4.20	2.86	12.00
25	13.60	1.59	8.55	13.60	1.80	7.56	13.40	2.14	6.26	13.20	2.47	5.34	12.60	2.70	4.67	12.00	2.93	4.10	12.60	2.93	4.10	12.60

WH-SXF09D3E8																						
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55	55	55	55	
-15	9.00	3.28	2.74	9.00	3.55	2.54	9.00	3.95	2.28	9.00	4.34	2.07	9.00	4.77	1.89	9.00	5.20	1.73	9.00	5.20	1.73	9.00
-7	9.00	2.75	3.27	9.00	3.20	2.81	9.00	3.66	2.46	9.00	4.11	2.19	9.00	4.31	2.09	9.00	4.50	2.00	9.00	4.50	2.00	9.00
2	9.00	2.40	3.75	9.00	2.55	3.53	9.00	2.82	3.19	9.00	3.09	2.91	9.00	3.60	2.50	9.00	4.11	2.19	9.00	4.11	2.19	9.00
7	9.00	1.68	5.36	9.00	1.90	4.74	9.00	2.20	4.09	9.00	2.50	3.60	9.00	2.80	3.21	9.00	3.10	2.90	9.00	3.10	2.90	9.00
25	13.60	1.54	8.83	13.60	1.75	7.77	13.20	1.97	6.70	12.80	2.18	5.87	12.00	2.45	4.90	11.20	2.71	4.13	12.00	2.71	4.13	12.00


WH-SXF12D9E8																						
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55	55	55	55	
-15	12.00	4.79	2.51	12.00	5.00	2.40	12.00	5.45	2.20	12.00	5.90	2.03	11.80	6.28	1.88	11.60	6.66	1.74	12.00	6.66	1.74	12.00
-7	12.00	3.89	3.08	12.00	4.45	2.70	12.00	5.02	2.39	12.00	5.58	2.15	12.00	5.94	2.02	12.00	6.30	1.90	12.00	6.30	1.90	12.00
2	12.00	3.23	3.72	12.00	3.53	3.40	12.00	3.91	3.07	12.00	4.29	2.80	12.00	4.90	2.45	12.00	5.51	2.18	12.00	5.51	2.18	12.00
7	12.00	2.22	5.41	12.00	2.57	4.67	12.00	3.00	4.00	12.00	3.43	3.50	12.00	3.82	3.14	12.00	4.20	2.86	12.00	4.20	2.86	12.00
25	13.60	1.59	8.55	13.60	1.80	7.56	13.40	2.14	6.26	13.20	2.47	5.34	12.60	2.70	4.67	12.00	2.93	4.10	12.60	2.93	4.10	12.60

Tamb: Ambient Temperature (°C). LWC: Leaving Water Condenser Temperature (°C). HC: Heating Capacity (kW). IP: Power Input (kW)
 This data is measured by Panasonic in accordance with EN14511-2 standard. This data is for reference purpose only, and does not guarantee the performance.

Constant Pressure Head Difference (Δp_c)

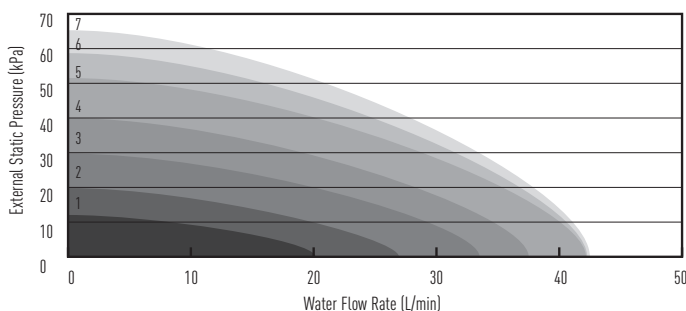

Variable Pressure Head Difference (Δp_v)

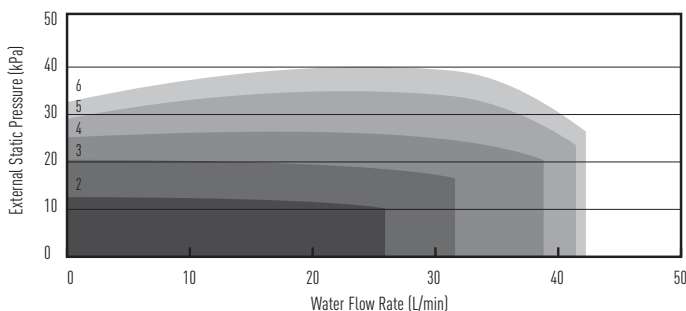


Heating Capacity table based on outlet temperature and outside temperature

Aquarea HT. Bi-Bloc Single Phase / Three Phase. Heating Only - SHF												
WH-SHF09D3E5												
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	35	35	35	45	45	45	55	55	55	65	65	65
-15	9	3.75	2.40	8.80	4.30	2.05	8.50	4.95	1.72	7.80	5.90	1.32
-7	9	3.33	2.70	8.90	3.87	2.30	8.90	4.50	1.98	8.90	5.50	1.62
2	9	2.65	3.40	9.00	3.25	2.77	9.00	3.92	2.30	9.00	4.80	1.88
7	9	1.98	4.55	9.00	2.50	3.60	9.00	3.16	2.85	9.00	4.00	2.25
WH-SHF12D6E5												
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	35	35	35	45	45	45	55	55	55	65	65	65
-15	12	5.57	2.15	10.80	5.53	1.95	9.70	5.80	1.67	8.00	6.15	1.30
-7	12	4.80	2.50	11.20	5.10	2.20	10.10	5.32	1.90	9.60	5.95	1.61
2	12	3.72	3.23	11.30	4.18	2.70	10.80	4.90	2.20	10.30	5.63	1.83
7	12	2.73	4.40	12.00	3.48	3.45	12.00	4.32	2.78	12.00	5.45	2.20
WH-SHF09D3E8												
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	35	35	35	45	45	45	55	55	55	65	65	65
-15	9	3.75	2.40	8.80	4.30	2.05	8.50	4.95	1.72	7.80	5.90	1.32
-7	9	3.33	2.70	8.90	3.87	2.30	8.90	4.50	1.98	8.90	5.50	1.62
2	9	2.65	3.40	9.00	3.25	2.77	9.00	3.92	2.30	9.00	4.80	1.88
7	9	1.98	4.55	9.00	2.50	3.60	9.00	3.16	2.85	9.00	4.00	2.25
WH-SHF12D9E8												
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	35	35	35	45	45	45	55	55	55	65	65	65
-15	12	5.57	2.15	10.80	5.53	1.95	9.70	5.80	1.67	8.00	6.15	1.30
-7	12	4.80	2.50	11.20	5.10	2.20	10.10	5.32	1.90	9.60	5.95	1.61
2	12	3.72	3.23	11.30	4.18	2.70	10.80	4.90	2.20	10.30	5.63	1.83
7	12	2.73	4.40	12.00	3.48	3.45	12.00	4.32	2.78	12.00	5.45	2.20

Tamb: Ambient Temperature (°C). LWC: Leaving Water Condenser Temperature (°C). HC: Heating Capacity (kW). IP: Power Input (kW)
 This data is measured by Panasonic in accordance with EN14511-2 standard. This data is for reference purpose only, and does not guarantee the performance.

Hydraulic Pump Performance

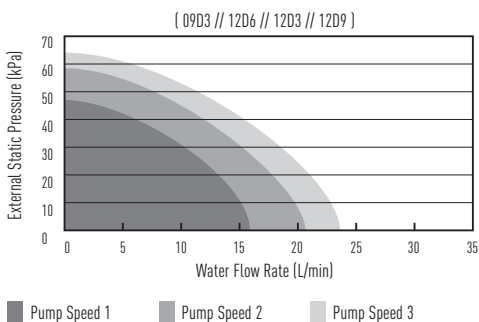

Aquarea Ht. Mono-Bloc Single Phase / Three Phase. Heating Only - MHF

WH-MHF09D3E5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	35	35	35	45	45	45	55	55	55	65	65	65
-15	9	3.75	2.40	8.80	4.30	2.05	8.50	4.95	1.72	7.80	5.90	1.32
-7	9	3.33	2.70	8.90	3.87	2.30	8.90	4.50	1.98	8.90	5.50	1.62
2	9	2.65	3.40	9.00	3.25	2.77	9.00	3.92	2.30	9.00	4.80	1.88
7	9	1.98	4.55	9.00	2.50	3.60	9.00	3.16	2.85	9.00	4.00	2.25

WH-MHF12D6E5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	35	35	35	45	45	45	55	55	55	65	65	65
-15	12	5.57	2.15	10.80	5.53	1.95	9.70	5.80	1.67	8.00	6.15	1.30
-7	12	4.80	2.50	11.20	5.10	2.20	10.10	5.32	1.90	9.60	5.95	1.61
2	12	3.72	3.23	11.30	4.18	2.70	10.80	4.90	2.20	10.30	5.63	1.83
7	12	2.73	4.40	12.00	3.48	3.45	12.00	4.32	2.78	12.00	5.45	2.20

WH-MHF09D3E8

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	35	35	35	45	45	45	55	55	55	65	65	65
-15	9	3.75	2.40	8.80	4.30	2.05	8.50	4.95	1.72	7.80	5.90	1.32
-7	9	3.33	2.70	8.90	3.87	2.30	8.90	4.50	1.98	8.90	5.50	1.62
2	9	2.65	3.40	9.00	3.25	2.77	9.00	3.92	2.30	9.00	4.80	1.88
7	9	1.98	4.55	9.00	2.50	3.60	9.00	3.16	2.85	9.00	4.00	2.25

WH-MHF12D9E8


Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	35	35	35	45	45	45	55	55	55	65	65	65
-15	12	5.57	2.15	10.80	5.53	1.95	9.70	5.80	1.67	8.00	6.15	1.30
-7	12	4.80	2.50	11.20	5.10	2.20	10.10	5.32	1.90	9.60	5.95	1.61
2	12	3.72	3.23	11.30	4.18	2.70	10.80	4.90	2.20	10.30	5.63	1.83
7	12	2.73	4.40	12.00	3.48	3.45	12.00	4.32	2.78	12.00	5.45	2.20

Tamb: Ambient Temperature (°C). LWC: Leaving Water Condenser Temperature (°C). HC: Heating Capacity (kW). IP: Power Input (kW)


This data is measured by Panasonic in accordance with EN14511-2 standard. This data is for reference purpose only, and does not guarantee the performance.

Dimensions


Hydraulic Module for all models

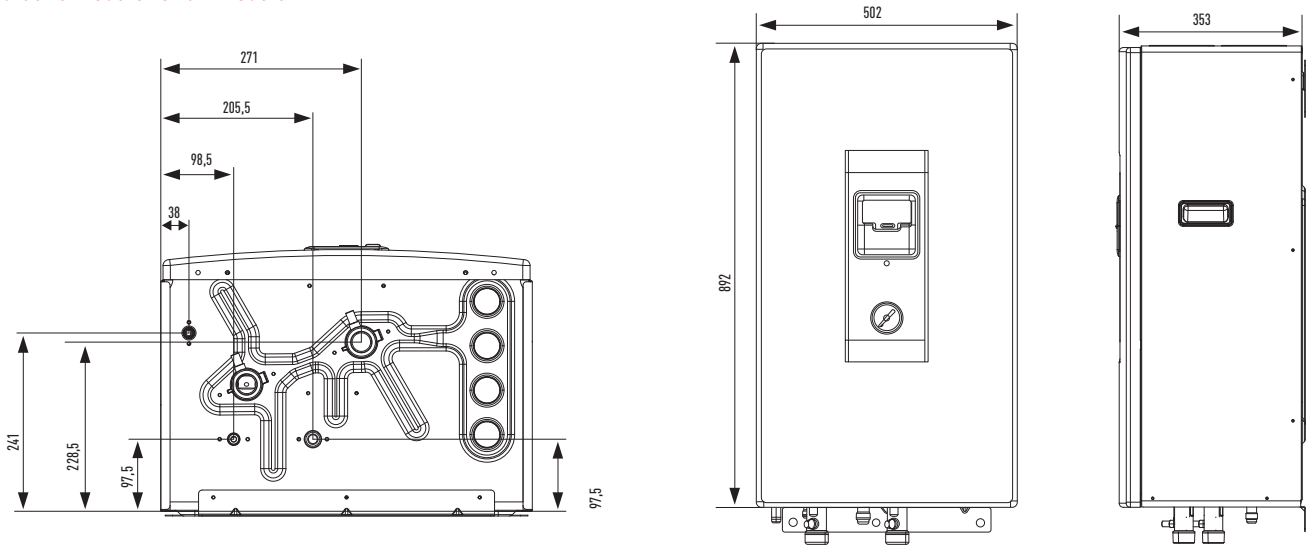


Bi-Bloc 3 and 5 kW

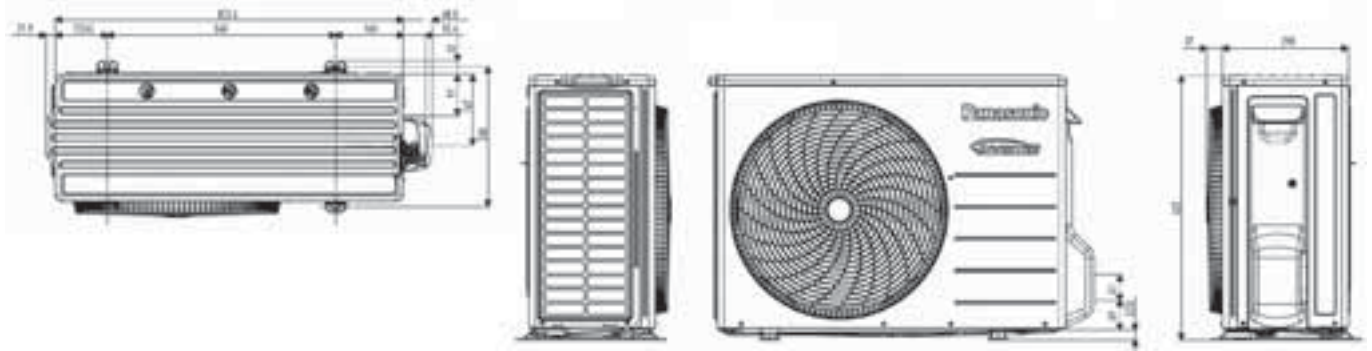


Mono-Bloc 6 and 9 kW

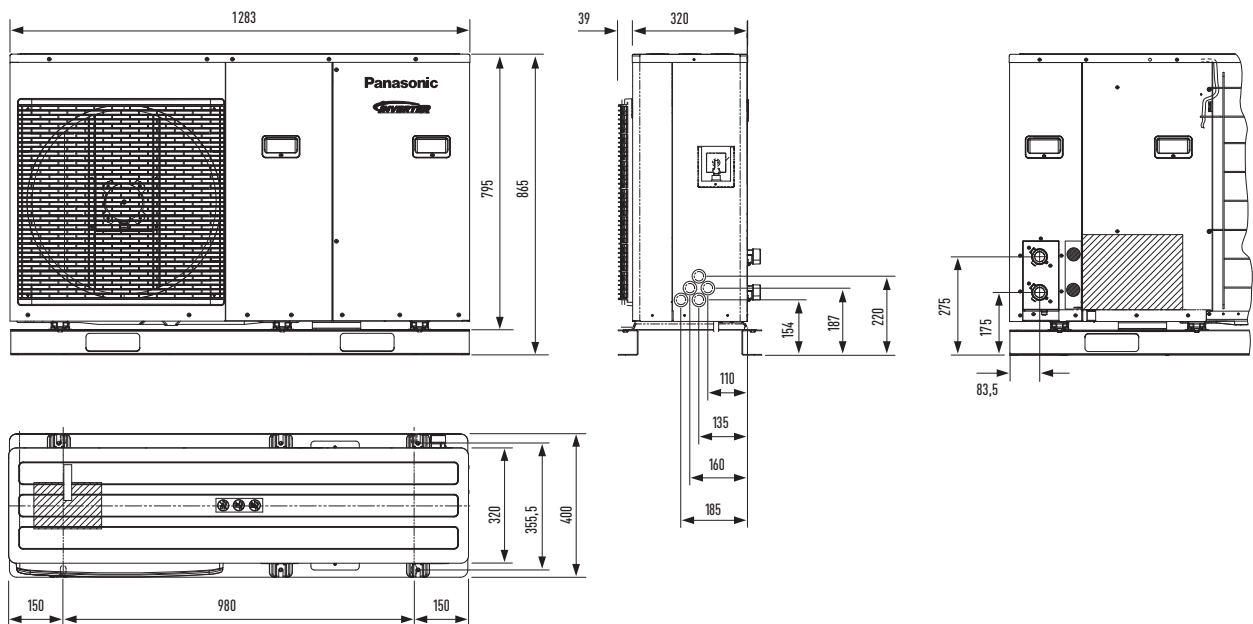


One Fan Outdoor Unit

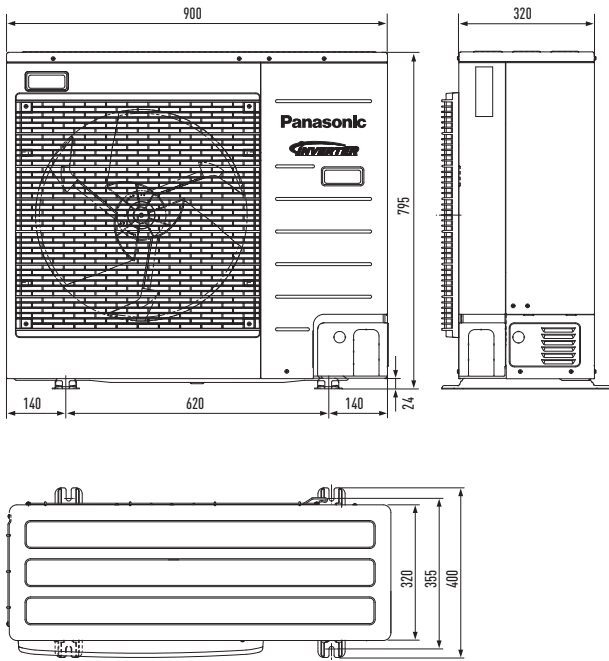

One Fan Outdoor Unit

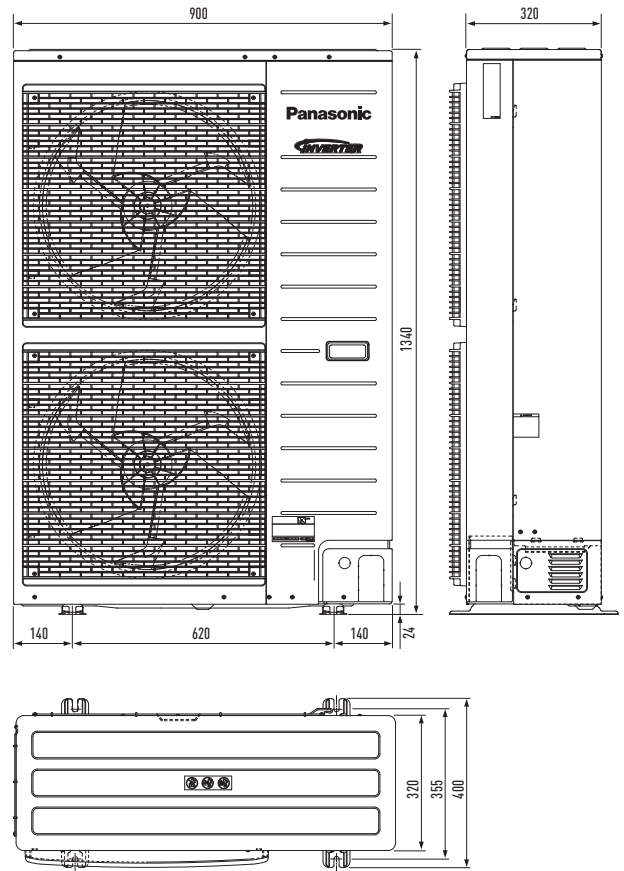

Mono-Bloc 9 to 16 kW

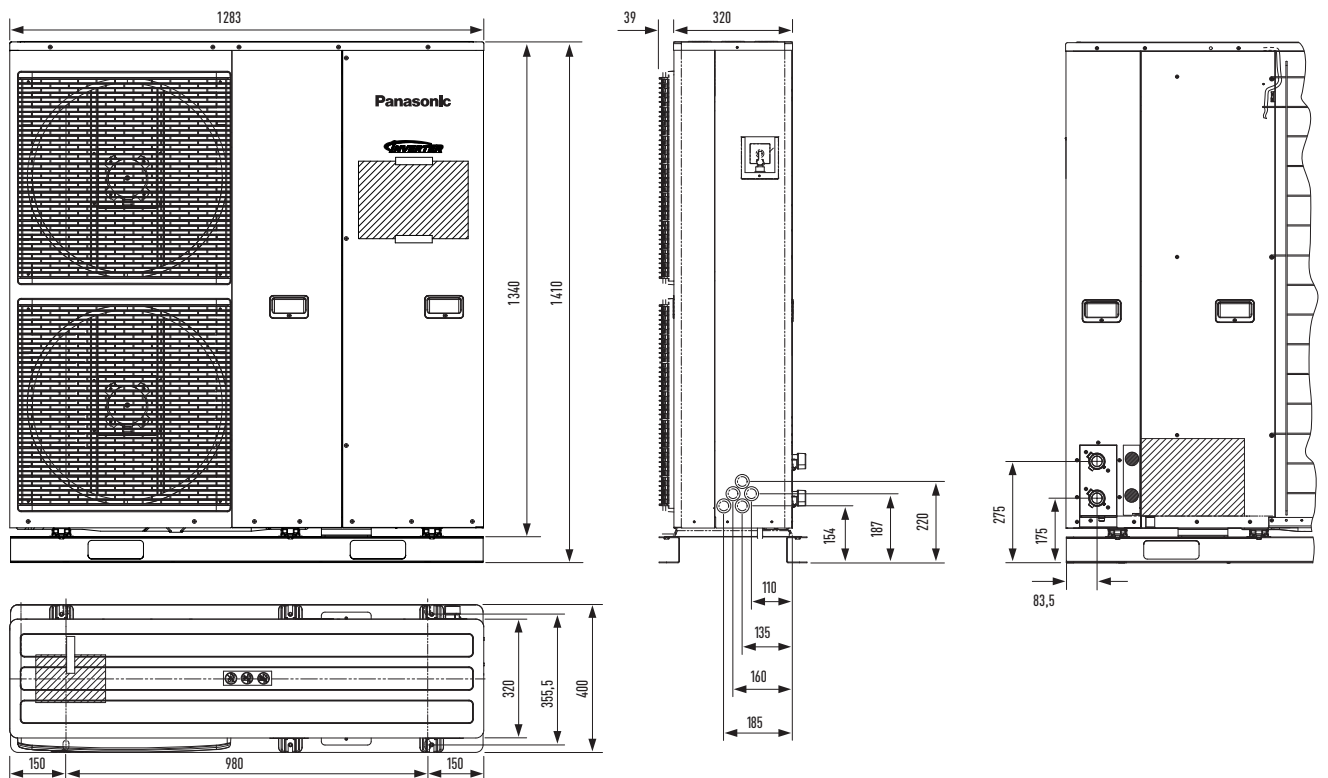

Due to the ongoing innovation of our products, the specifications of this catalogue are valid barring typographic errors, and may be subject to minor modifications by the manufacturer without prior warning in order to improve the product. The total or partial reproduction of this catalogue is prohibited without the express authorisation of Panasonic UK Ltd.



www.panasonic-heating.com

Visit the AQUAREA website for more information The AQUAREA website has been designed to show you how you can save money on your heating bills when you install a Panasonic AQUAREA Air Source Heat Pump System.

Panasonic®

To find out how Panasonic cares for you,
log on to: www.panasonic.eu

Contact Details:

Telephone: 01344 853182
www.panasonic.co.uk/aircon

Address: Panasonic Air Conditioning

Panasonic House
Willoughby Road
Bracknell
Berkshire
RG12 8FP